ORDER NO. AD9605126A8

Service Manual

Portable CD Player

SL-XP340

COMPACT disc DIGITAL AUDIO

DIGITAL

MASH multi-stage noise shaping ※

※ • MASH is a trademark of NTT.

Colour

(K)...Black Type

Area

Suffix for Model No.	Area	Colour
(E)	Europe.	(K)
(EB)	Great Britain.	
(EG)	Germany and Italy.	
(GC)	Asia, Latin America, Middle Near East and Africa.	

Please file and use this manual together with the service manual for Model No. SL-XP240, Order No. AD9604095C8.

Note: • This simplified service manual is provided to indicate the main differences between the original model No. SL-XP240 (E) and the subsequent model No. SL-XP340(E,EB, EG, GC).

CHANGES

■PACKAGING(SL-XP240 Service Manual of page 35.)

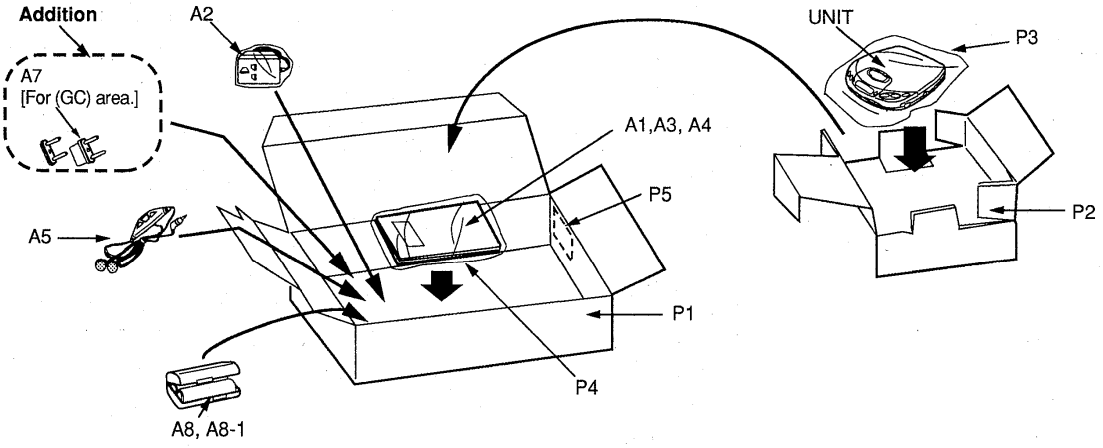

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Technics®

© 1996 Matsushita Electric Industrial Co., Ltd.
All rights reserved. Unauthorized copying and distribution is a violation of law.

CHANGE IN REPLACEMENT PARTS LIST (SL-XP240 Service Manual of pages 32, 34～36.)

Notes: • Mentioned in this parts list is only those different from Model No. SL-XP240 (E).
All other parts are the same as for SL-XP240 (E).
• Important safety notice:
Components identified by ⚠ mark have special characteristics important for safety. Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used. When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.

Ref. No.	Change of Part No. SL-XP240 (E) ➡ SL-XP340 (E,EB, EG, GC)		Part Name & Description	Remarks
INTEGRATED CIRCUIT(S)				
IC503	LH6456K2	MN41440CSJ7T	4M DRAM	
TRANSISTOR(S)				
Q903	—	2SB1218QRSTX	TRANSISTOR	Addition
Q909	—	UN5114TX	TRANSISTOR	Addition
Q910	—	UN5117TX	TRANSISTOR	Addition
Q911,912	—	2SD1819QRSTX	TRANSISTOR	Addition
DIODE(S)				
D902	—	1SS355TE17	DIODE	Addition
D905	—	1SS355TE17	DIODE	Addition
CONNECTOR(S) AND JACK(S)				
CN701	RJJ34TH02-C	RJJ36T02-C	HEADPHONES JACK	
RESISTORS				
R30	—	ERJ6GEYJ222V	1/10W 2.2k	Addition
R901	—	ERJ6GEYJ821V	1/10W 820	Addition
R904	—	ERJ6GEYJ153V	1/10W 15k	Addition
R905	—	ERJ6GEYJ473V	1/10W 47k	Addition
R917	—	ERJ6GEYJ104V	1/10W 100k	Addition
R918	—	ERJ6GEYJ683V	1/10W 68k	Addition
CHIP JUMPERS				
RJ502	—	ERJ6GEY0R00V	CHIP JUMPER	Addition
RJ901,902	—	ERJ6GEY0R00V	CHIP JUMPER	Addition
CAPACITORS				
C25	ECEA1HKA010I	ECEA1HKN010I	50V 1U	
C26	—	ECEA1HKN010I	50V 1U	Addition
C901	—	ECUV1H332KBN	50V 3300P	Addition
CABINET AND CHASSIS				
5	RFKJLXP240EK	RFKJLXP340EK	BOTTOM CABINET ASS'Y	(E,EG)
		RFKJLXP340EB	BOTTOM CABINET ASS'Y	(EB)
		RFKJLXP340GC	BOTTOM CABINET ASS'Y	(GC)
7	RYF0402F-K	RYF0402B-K	CD COVER ASS'Y	
12	RFKKLS240P-K	RFKKLS340P-K	INTERMEDIATE CABINET ASS'Y	
PACKING MATERIAL				
P1	RPK0752	RPK0753	PACKING CASE	
ACCESSORIES				
A1	RFKSLXP240EK	RFKSLXP240EK	INSTRUCTION MANUAL ASS'Y	(E)
		RQT3400-B	INSTRUCTION MANUAL	(EB)
		RFKSLXP240EG	INSTRUCTION MANUAL ASS'Y	(EG)
		RFKSLXP240GC	INSTRUCTION MANUAL ASS'Y	(GC)
A2	RFEA401E-2S	RFEA401E-2S	AC ADAPTOR	(E,EG) ⚠
		RFEA404B-1W	AC ADAPTOR	(EB) ⚠
		RFEA403Z-S	AC ADAPTOR	(GC) ⚠
A5	RFEV317A-KS	RFEV133A-KS	STEREO EARPHONES WITH R.C.	
A7	—	—	—	(E)
		—	—	(EB)
		—	—	(EG)
		SJP5213-2	POWER PLUG ADAPTOR	(GC) ⚠ Addition
A8	RP-BP60EYS1	RP-BP60EYS1	RECHARGEABLE BATTERIES	(E,EB,EG)
		RP-BP60SYS2	RECHARGEABLE BATTERIES	(GC)
< PRINTED CIRCUIT BOARDS ASS'Y >				
PCB1	REP2239C-M	REP2239G-M	P.C.B. ASS'Y	(RTL)

Notes: • The marking (RTL) indicates that the Retention Time is limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.
After the end of this period, the assembly will no longer be available.

■PRINTED CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM

(SL-XP240 Service Manual of page 25.)

Notes:

- In this printed circuit board diagram, the parts and foil patterns on the board facing toward you are printed in black.
  The opposite side is printed in blue.
- The "●" mark denotes the connection points of double-faced foil patterns (through holes) on both sides of the printed circuit board.
- This printed circuit board diagram may be modified at any time with the development of new technology.

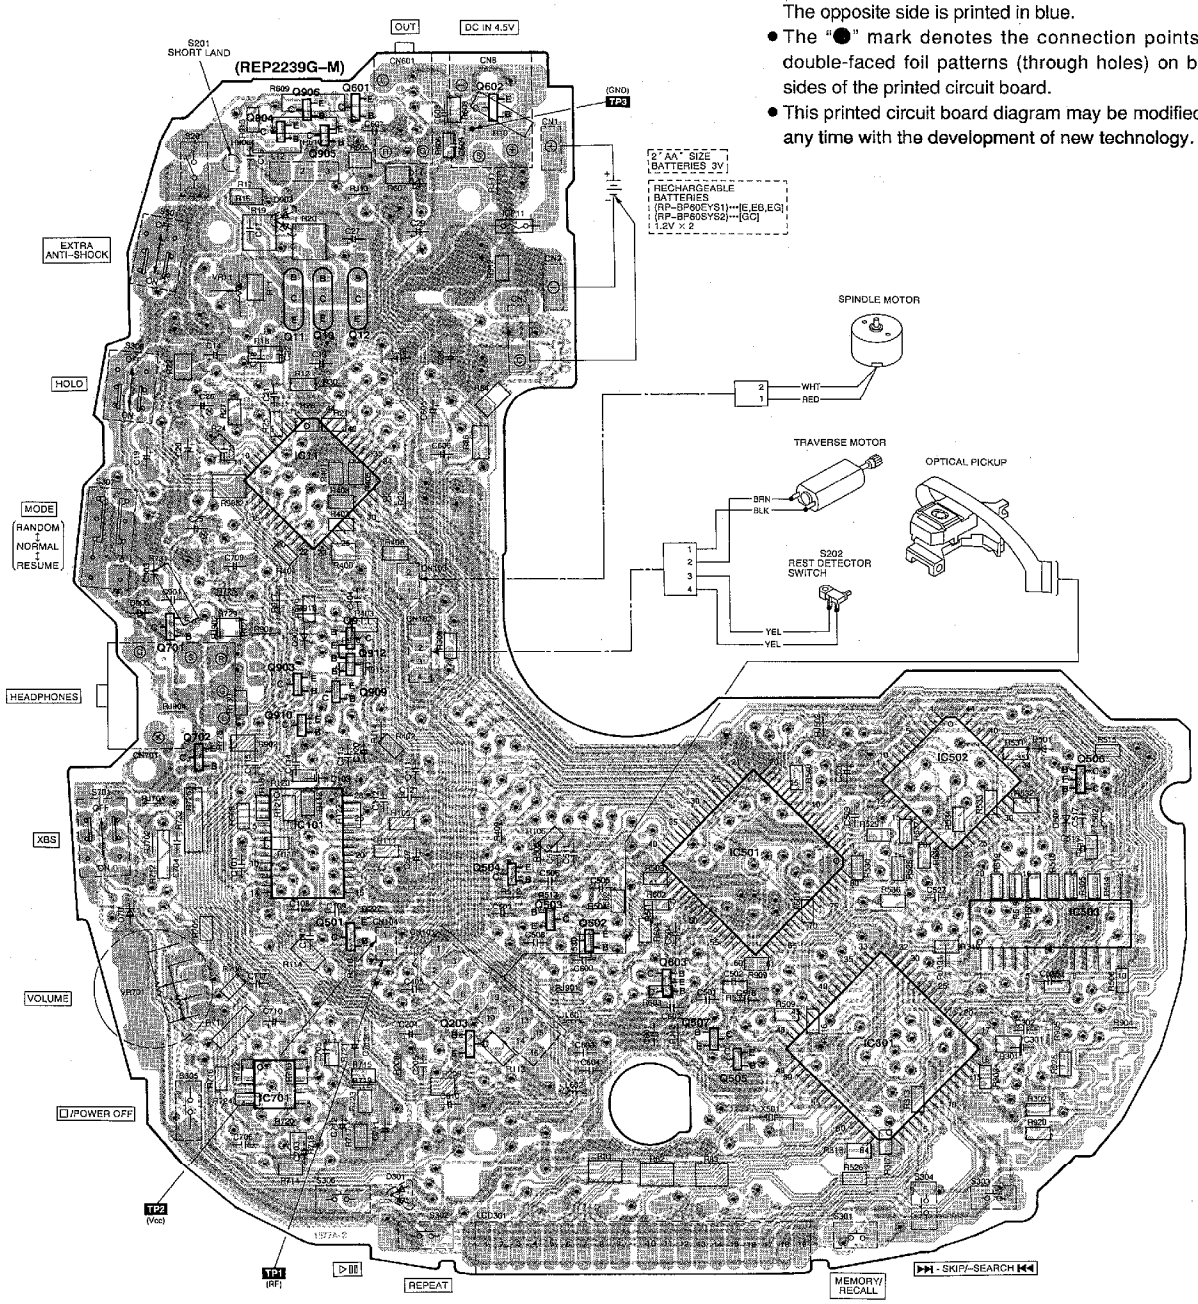

SCHEMATIC DIAGRAM (SL-XP240 Service Manual of pages 20～24.)

(P.C.Board:on page 3)

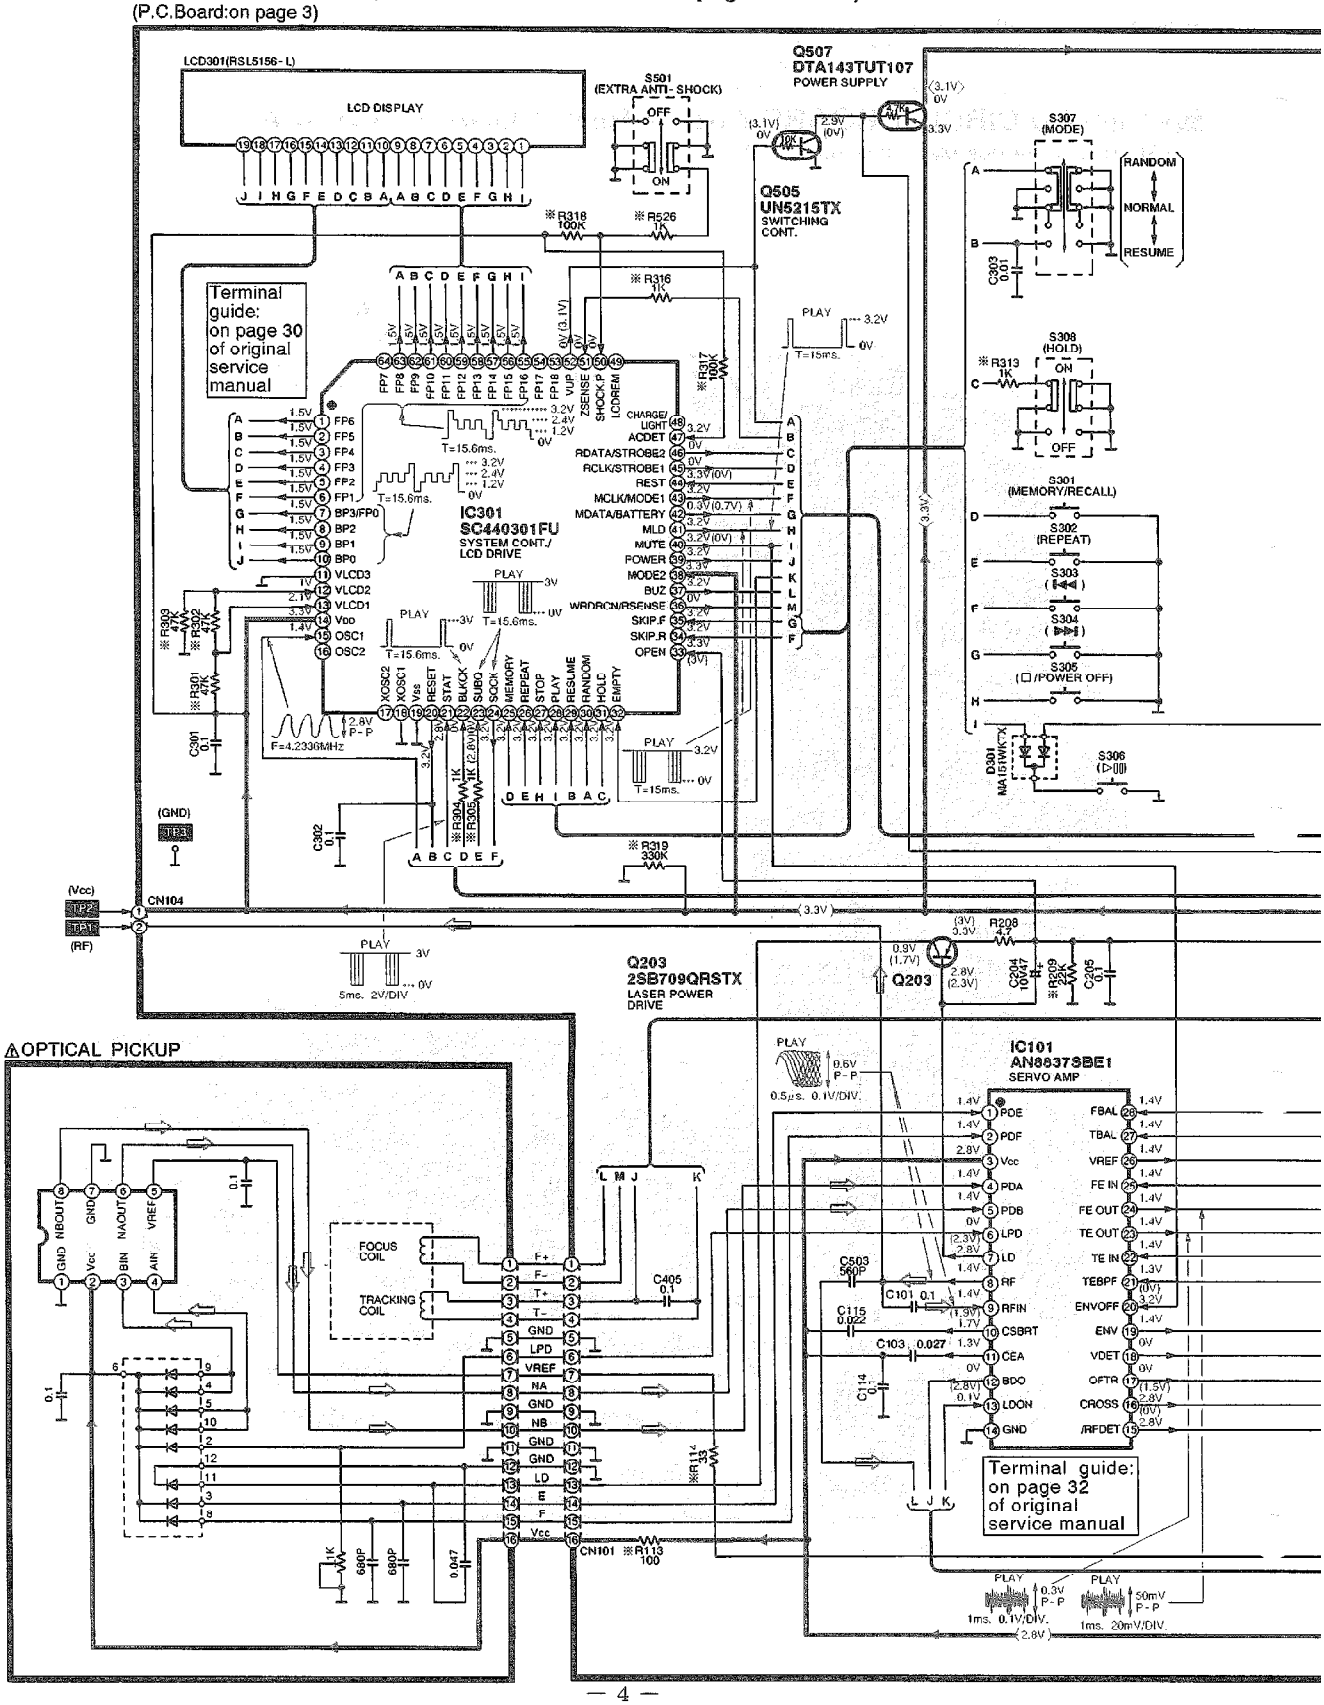

Note: This schematic diagram may be modified at any time with development of new technology. ● ⟹ : Audio signal lines.

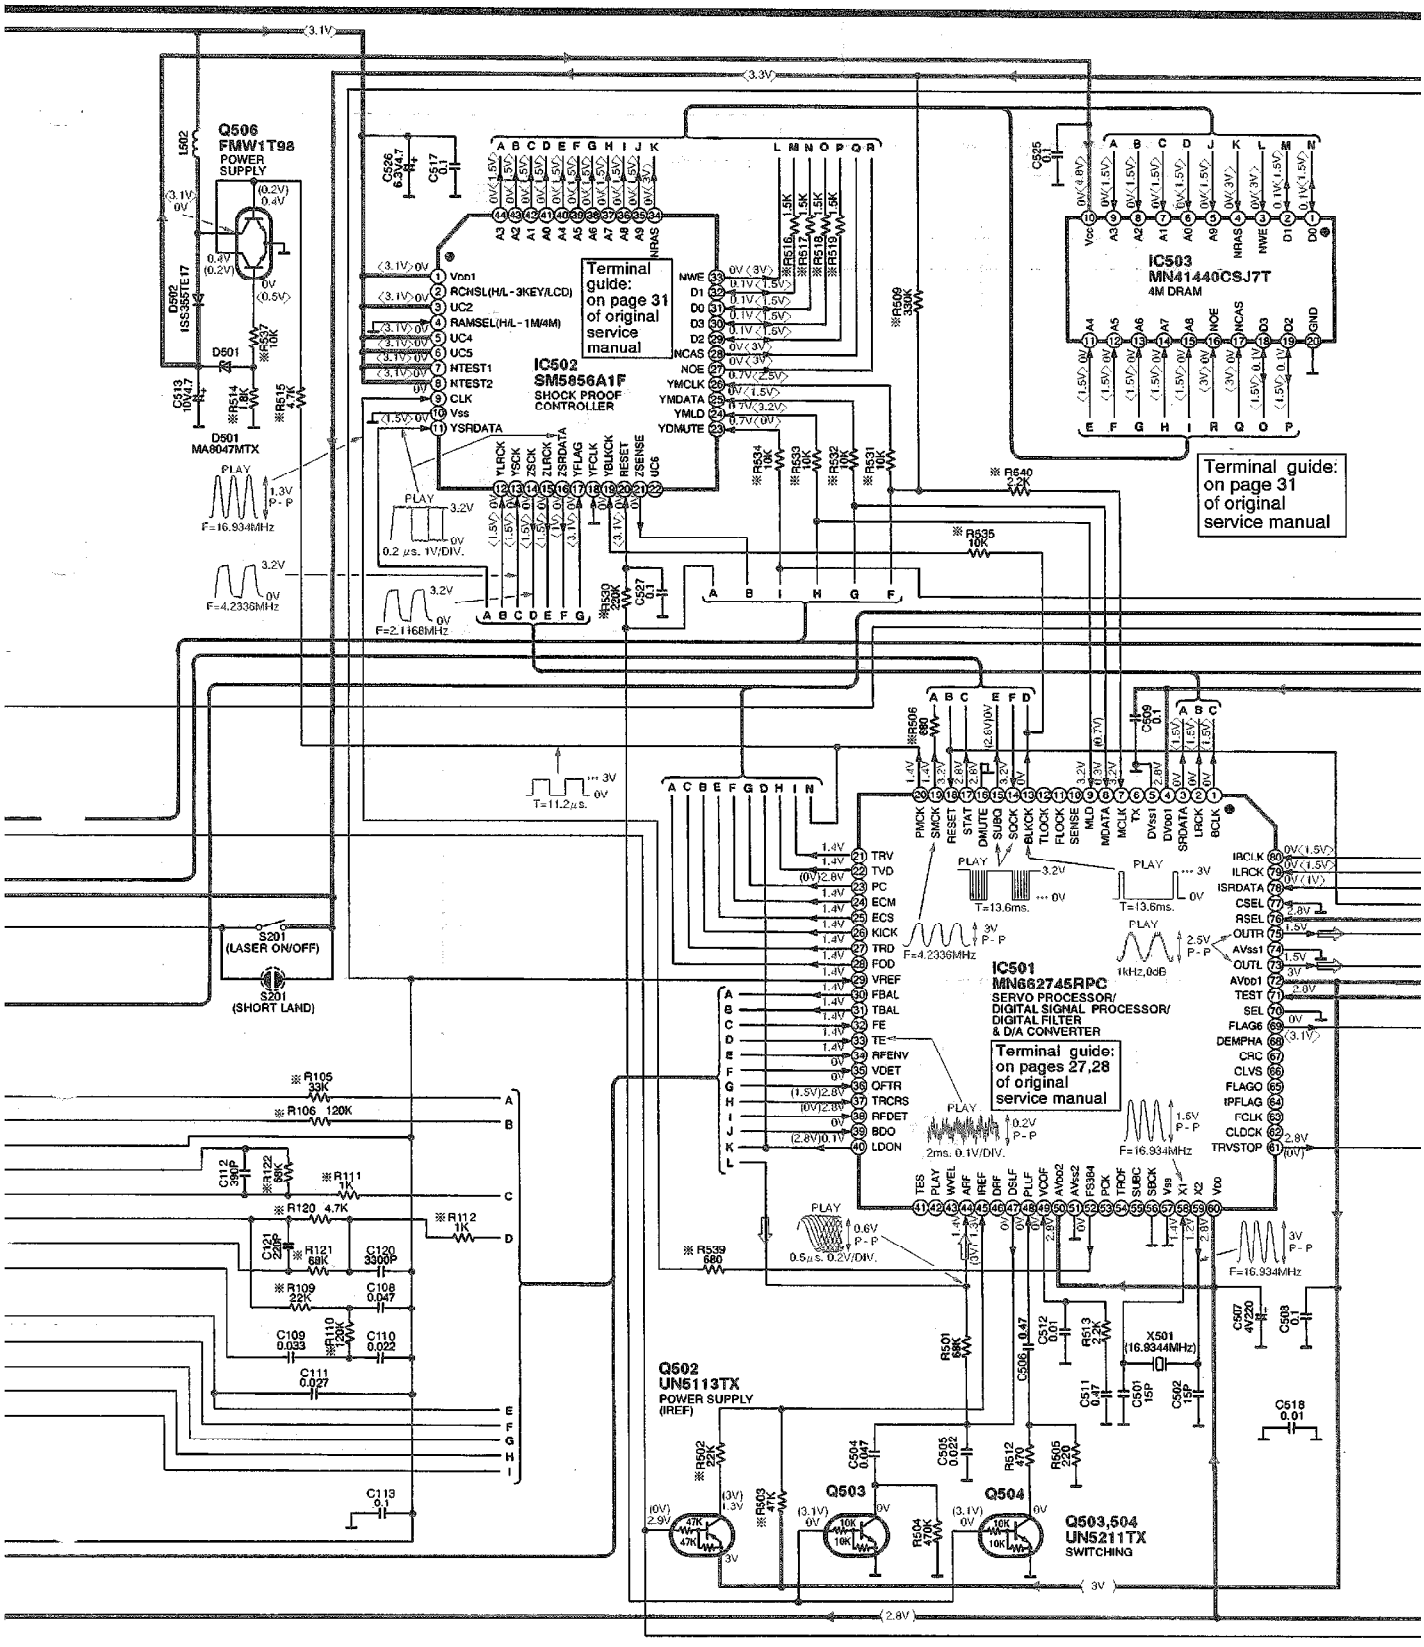

● ⇨ : Audio signal lines.

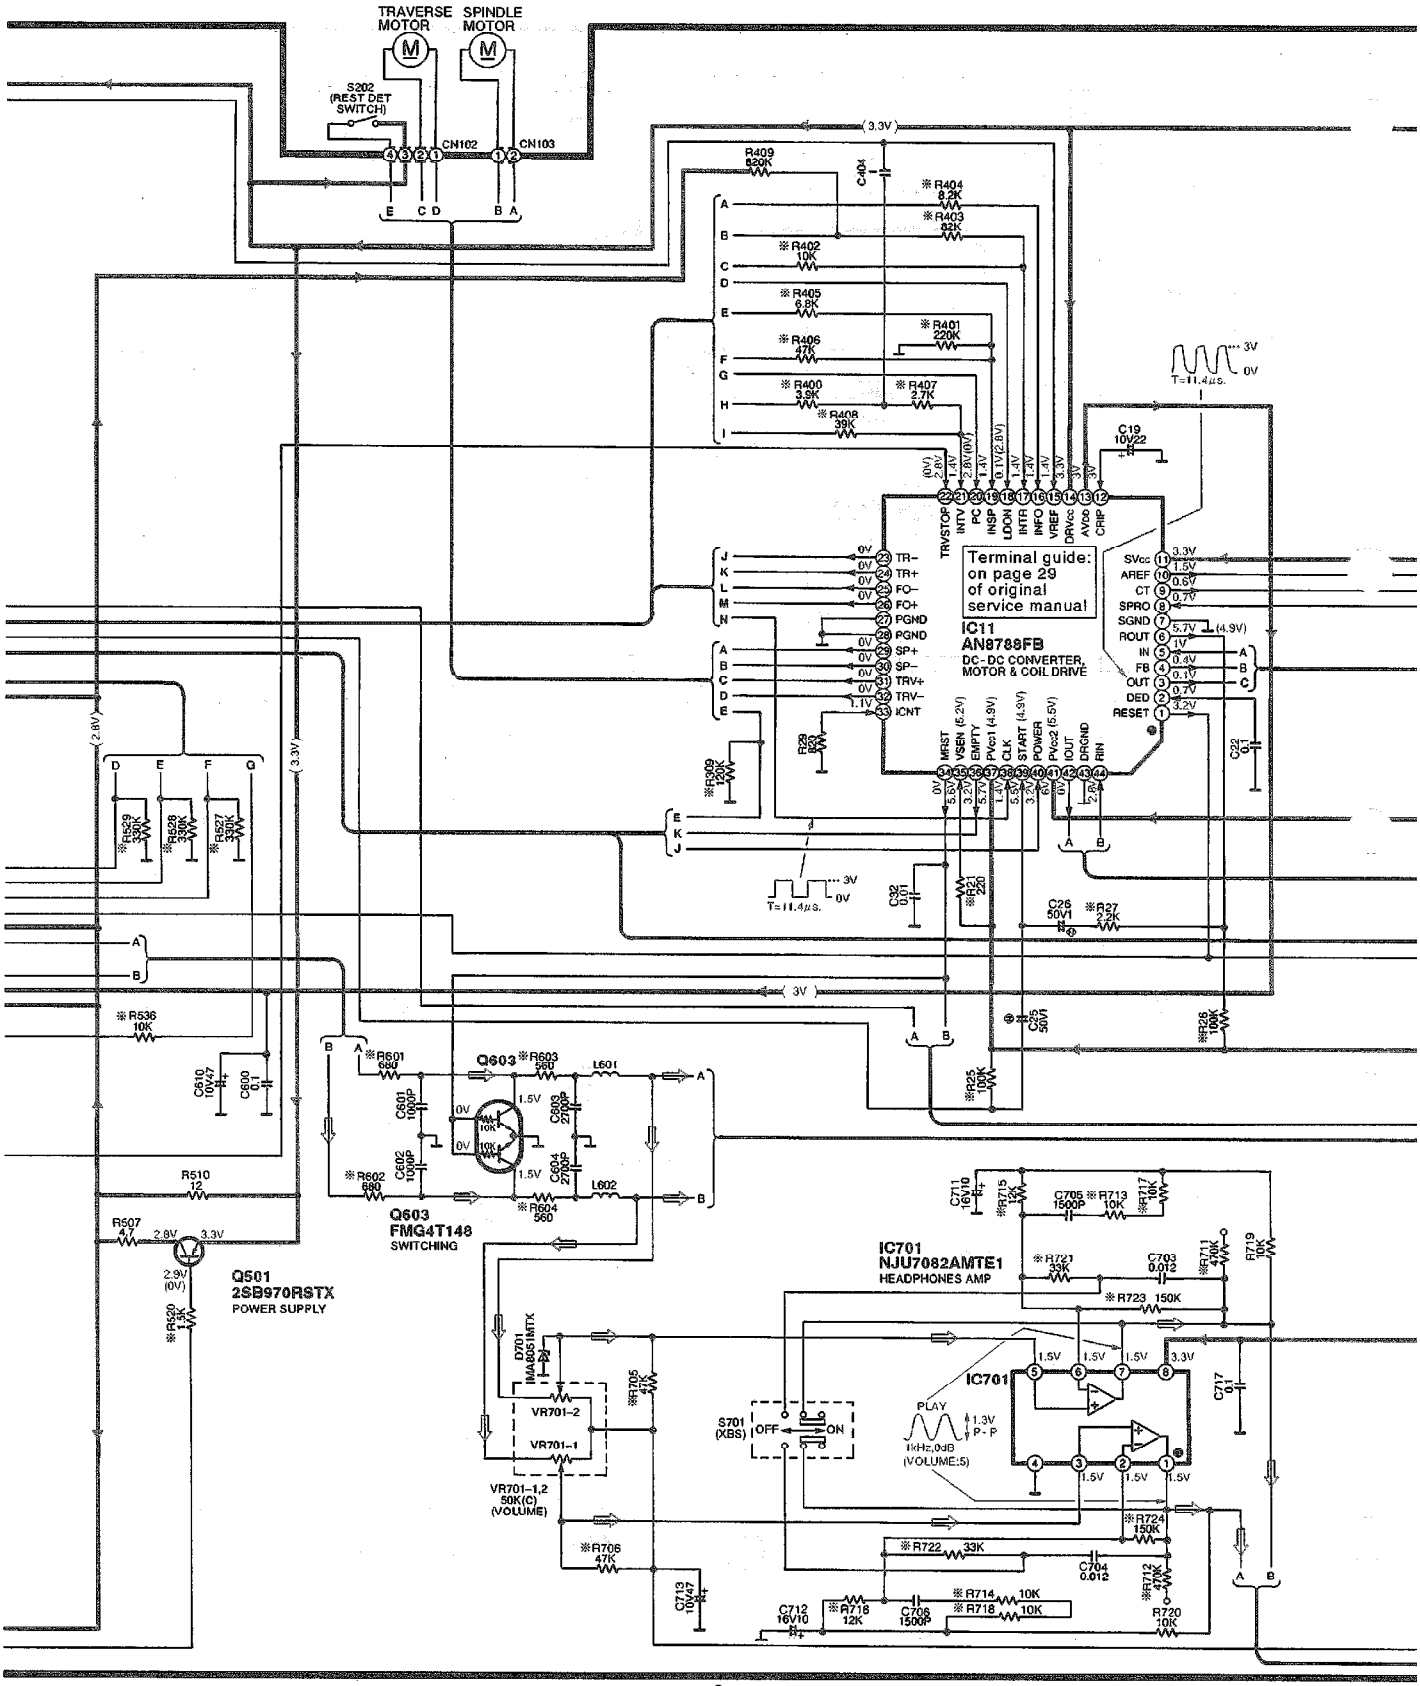

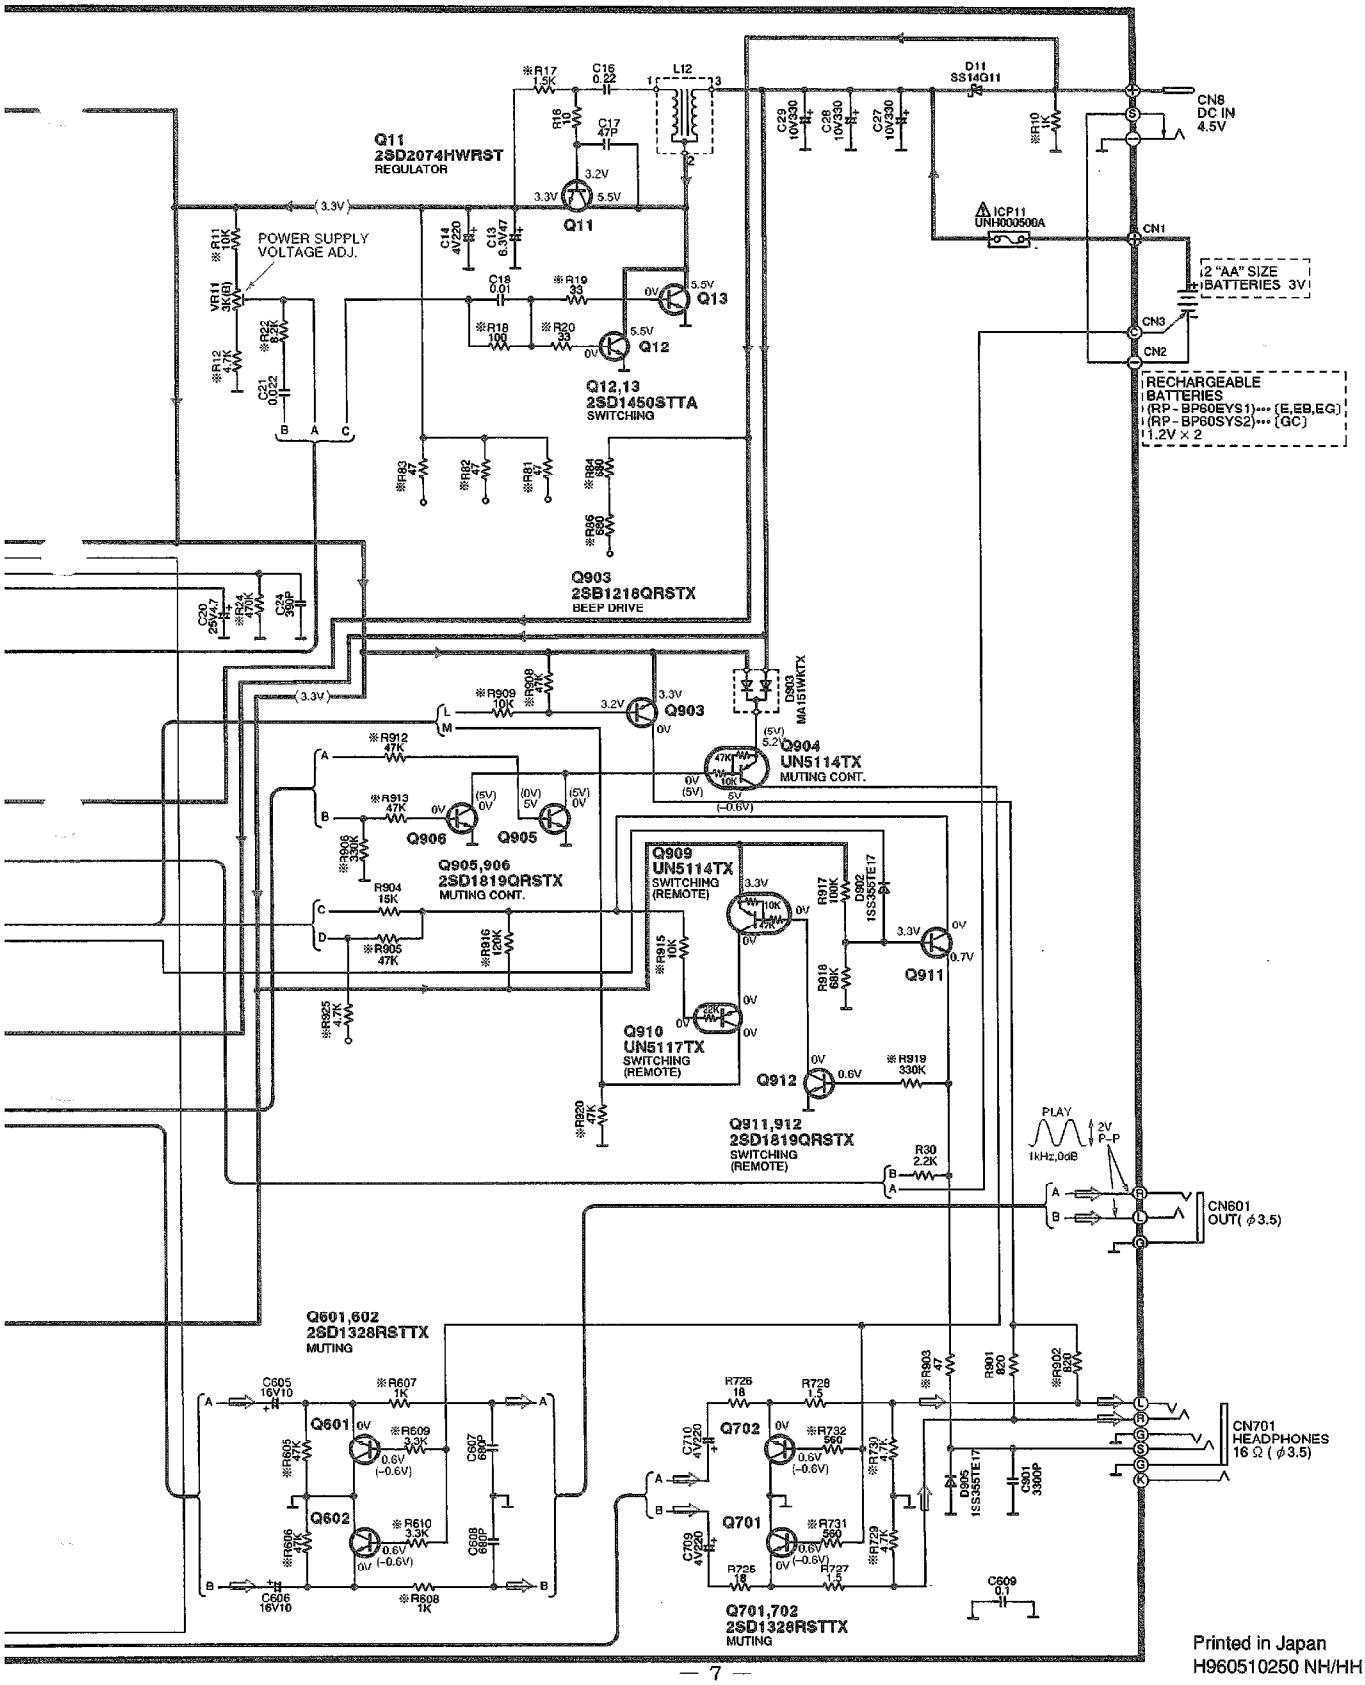

Printed in Japan
H960510250 NH/HH

ORDER NO. AD9604095C8

Service Manual

Portable CD Player

SL-XP240

COMPACT disc DIGITAL AUDIO

DIGITAL MASH※ multi-stage noise shaping

※ • MASH is a trademark of NTT.

Colour

(K)...Black Type

Area

Suffix for Model No.	Area	Colour
(E)	Europe.	(K)
(EB)	Great Britain.	
(EG)	Germany and Italy.	
(GC)	Asia, Latin America, Middle Near East and Africa.	
(GN)	Oceania.	

TRAVERSE DECK: RAE0141Z MECHANISM SERIES

■SPECIFICATIONS

■Audio

No. of channels: 2 channels (left and right, stereo)
Output voltage: 0.6 V (50 kΩ) φ3.5 stereo mini jack
Frequency response: 20~20,000 Hz (+0.5 dB, −1.5 dB)
S/N: more than 94 dB*
Wow and flutter: Below measurable limit
DA converter: 1 bit, MASH※
Headphone output level: max. 9 mW+9 mW/16Ω (variable) stereo mini jack φ3.5
Digital filter: 8 times over sampling

■Signal Format

Correction system: Technics New Super Decoding Algorithm

■Pickup

Type: One beam
Light source: Semiconductor laser
Wavelength: 780 nm
Lens: Glass pressed lens

■Playing time;

[When used in hold mode, at 25°C temperature and on flat and stable surface.]

Batteries used	Anti-shock OFF/ON
Rechargeable batteries	About 3 hours/ About 2 hours 30 minutes
Panasonic alkaline dry cell batteries	About 10 hours/ About 7 hours/ 30 minutes

The play time may be less depending on the operating conditions.

Recharging time; About 3 hours

■General

Power requirement: AC; with an included panasonic AC adaptor
RFEA401E-2S (E, EG)
RFEA404B-1W (EB)
RFEA403Z-S (GC)
RFEA403A-S (GN)
Batteries; DC 3 V (two "AA" size batteries, not included)
(Panasonic R6P/LR6 or equivalent, not included)
Rechargeable Batteries; DC 2.4 V with an optional Panasonic Rechargeable Batteries (SH-CDB8D set of 2)
Car Battery; with an optional Pansonic car adaptor (SH-CDC9)
DC IN: DC 4.5 V
Operation temperature range: 0°C−40°C
Rechargeable temperature range: 5°C−40°C
Power supply: DC 4.5 V
Power consumption:
Using AC adaptor; 5.5 W/5.7W(Anti-shock OFF/ON)
Dimensions (W×H×D): 128×29×140 mm
Weight: 225 g without batteries
270 g with batteries

*These specifications were measured in the anti-shock OFF mode.

Note: Design and specifications are subject to change without notice. Weight and dimensions are approximate.

Technics®

© 1996 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

	Page
PRECAUTION OF LASER DIODE	2
ACCESSORIES	3
LOCATION OF CONTROLS	3
POWER SUPPLY PREPARATIONS	3
ACCIDENTAL OPERATION PREVENTION FUNCTION	4
SEQUENTIAL PLAY	4~6
USING THE UNIT WITH OPTIONAL ACCESSORIES	6
CAUTIONS	7
HANDLING PRECAUTIONS FOR TRAVERSE DECK	8
OPERATION CHECKS AND MAIN COMPONENT REPLACEMENT PROCEDURES	9~11
CHECKING THE OPERATION PROBLEMS ON THE TRAVERSE DECK (OPTICAL PICKUP)	12
AUTOMATIC ADJUSTMENT RESULTS DISPLAY FUNCTION (SELF-CHECK FUNCTION)	13, 14
MEASUREMENTS AND ADJUSTMENTS	14, 15
BLOCK DIAGRAM	16~19
SCHEMATIC DIAGRAM	20~24
PRINTED CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM	25
REPAIRING THE PRINTED RESISTOR	26
TERMINAL GUIDE	27~32
REPLACEMENT PARTS LIST	32
CABINET PARTS LOCATION	33
REPLACEMENT PARTS LIST	34,35
PACKAGING	35
RESISTORS AND CAPACITORS	36

PRECAUTION OF LASER DIODE

CAUTION: This product utilizes a laser diode with the unit turned "on", invisible laser radiation is emitted from the pickup lens.
Wave length: 780 nm
Maximum output radiation power from pickup: 100 µW/VDE

Laser radiation from the pickup lens is safety level, but be sure the followings:

1. Do not disassemble the optical pickup unit, since radiation from exposed laser diode is dangerous.
2. Do not adjust the variable resistor on the pickup unit. It was already adjusted.
3. Do not look at the focus lens using optical instruments.
4. Recommend not to look at pickup lens for a long time.

ACHTUNG: Dieses Produkt enthält eine Laserdiode. Im eingeschalteten Zustand wird unsichtbare Leserstrahlung von der Lasereinheit abgestrahlt.

Wellenlänge: 780 nm
Maximale Strahlungsleistung der Lasereinheit: 100 µW/VDE

Die Strahlung an der Lasereinheit ist ungefährlich, wenn folgende Punkte beachtet werden:

1. Die Lasereinheit nicht zerlegen, da die Strahlung an der freigelegten Laserdiode gefährlich ist.
2. Den werkseitig justierten Einstellregler der Lasereinhit nicht verstellen.
3. Nicht mit optischen Instrumenten in die Fokussierlines blicken.
4. Nicht über längere Zeit in die Fokussierlines blicken.

ADVARSEL: **I dette a apparat anvendes laser.**

VARO! Avattaessa ja suojalukitus ohitettaessa olet alttiina näkymätön lasersäteilylle. Älä katso säteesen.
VARNING! Osynlig laserstrålning när denna del är öppnad och spärren är urkopplad. Betrakta ej strålen.
ADVERSEL! Usynlig laserstråling når deksel åpnes og sikkerhedslås brytes. Unngå eksponering for strålen.

(Tuotteen pohjassa)
(Apparatens undersida)
(Produktets underside)



(Bottom of the product)



Bottom of the unit
Parte inferior del aparato
Apparatens undersida
Komponentens underside
Produktets underside


ADVARSEL: USYNLIG LASERSTRÅLING VED ÅBNING, NÅR SIKKERHEDSAFBRYDERE ER UDE AF FUNKTION. UNDGÅ UDSÆTTELSE FOR STRÅLING.

(Påsat under apparatet)

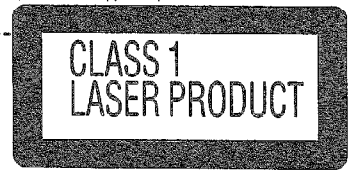

LUOKAN 1 LASERLAITE
KLASS 1 LASER APPARAT

CAUTION!
THIS PRODUCT UTILIZES A LASER. USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.
DO NOT OPEN COVERS AND DO NOT REPAIR YOURSELF. REFER SERVICING TO QUALIFIED PERSONNEL.

Marking sign is located on bottom of the unit.

ACCESSORIES

- AC adaptor .....1 pc.
  RFEA401E-2S [for (E, EG) areas.] RFEA404B-1W [for (EB) area.] RFEA403Z-S [for (GC) area.] RFEA403A-S [for (GN) area.]
- Power plug adaptor .....1 pc.
  SJP5213-2 [for (GC) area.]
- Stereo earphones.....1 pc.
  RFEV317A-KS [for (E, EB, EG,GC, GN,) areas.]

LOCATION OF CONTROLS

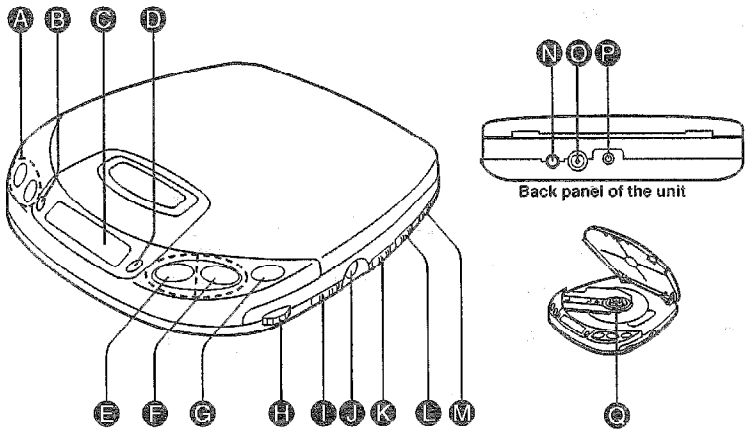

- Ⓐ Skip/search buttons (⏮, ⏭ •SKIP/ SEARCH)
- Ⓑ Memory/recall button (MEMORY/RECALL)
- Ⓒ Display
- Ⓓ Repeat button (REPEAT)
- Ⓔ Play/pause button (▶ ⏸)
- Ⓕ Stop/power off button (■/POWER OFF)
- Ⓖ Open button (OPEN)
- Ⓗ Headphones volume control (VOLUME)
- Ⓘ XBS switch (XBS)
- Ⓙ Headphones jack (∩)16Ω ϕ3.5
- Ⓚ Play mode selector (MODE)
- Ⓛ Hold switch (HOLD)
- Ⓜ Anti-shock switch (ANTI-SHOCK)
- Ⓝ Out jack (OUT)
- Ⓞ DC in jack (DC IN 4.5 V ⟡⊖⟡)
- Ⓟ Hole for car insulator mounting screw
- Ⓠ Push button (PUSH)

POWER SUPPLY PREPARATIONS

Refer to the specifications (back cover) for the duration of the play time provided when rechargeable or dry cell batteries are used.

Using rechargeable batteries

Make sure that the rechargeable batteries have been recharged before use.

Recharging procedure

1 Place the rechargeable batteries inside the unit.

(No batteries other than RP-BP60/ SH-CDB8D can be recharged.)

If the battery compartment lid becomes disengaged, position it horizontally and press it back into position.

2 Connect the AC adaptor.

(For areas except Continental Europe.)

The AC voltage is different according to the area. Be sure to set the proper voltage in your area before use.

(For details, please refer to the attached sheet.)

ⓐ DC IN jack (DC IN 4.5 V ⟡⊖⟡)
ⓑ Back panel of the unit
ⓒ AC power outlet
ⓓ AC adaptor

Note

The configuration of the AC adaptor differs according to the area.

- It takes about 3 hours to fully recharge the batteries.

3 Upon completion of the recharging, disconnect the AC adaptor from the DC IN jack and power outlet.

Removing the batteries A

Push the batteries upward in the direction of the arrow to remove them.

- The batteries can be used for about 10 months (300 times) if they are used every day. They will need to be replaced if the duration of their operation drops drastically.
- You can operate the unit with the AC adaptor while recharging the batteries, but it will lengthen the recharging time.
- Recharging should be performed at 5°C~40°C.
- While recharging, the AC adaptor and rechargeable batteries may get warm. This is normal.

Using the dry cell batteries (not included)

Disconnect the AC adaptor and then install two LR6 (UM-3) type alkaline batteries.

The batteries are inserted and removed in the same way as for the rechargeable batteries.

Using the AC adaptor

Connect the AC adaptor supplied.

Refer to the section on "Using the rechargeable batteries" for details on the connections.

Note

The unit is in the standby condition when the AC adaptor is connected. The primary circuit is always "live" as long as the AC adaptor is connected to an electrical outlet.

Using the car adaptor (not included)

Be sure to obtain the car adaptor (SH-CDC9), available as an optional accessory.

The batteries can be recharged inside the car using the car adaptor.

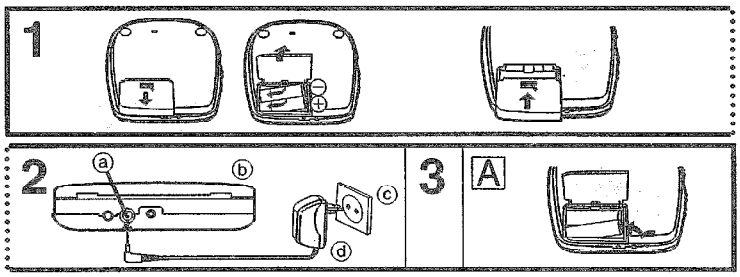

ACCIDENTAL OPERATION PREVENTION FUNCTION

This function prevents the unit from operating even if a control button is pressed in error. (The disc lid can still be opened and closed.)
Use the function to prevent the following situations:

Example 1:
While the unit is not in use, the power is inadvertently turned on and the batteries run down.

Example 2:
Play is interrupted while the unit is in use.

To use the accidental operation prevention function

Set HOLD to the HOLD position. [A]
ⓐ Hold mode

"hold" indicator

If the unit is in the hold mode, the "hold" indicator appears when any of the unit's function buttons (except OPEN) is pressed.

When the unit is turned off
The "hold" indicator appears only when ▶ ❚❚ is pressed.

Before operating the buttons
Be absolutely sure to move HOLD to release the unit from the hold mode.



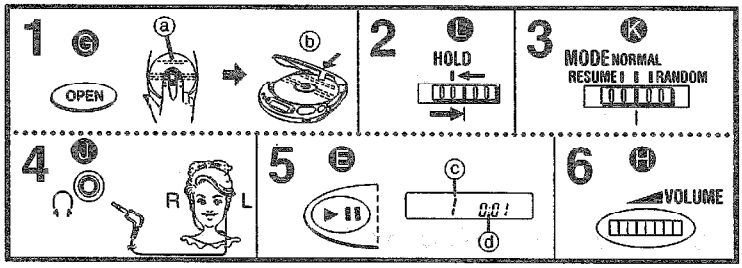

SEQUENTIAL PLAY

1 Press OPEN to open the lid, and insert the disc.

Label must face upward.

Press the area near the center hole of the disc until it clicks into position.

Close the lid.

2 Release the hold mode.

HOLD

3 Set MODE to NORMAL.

MODE NORMAL
RESUME RANDOM

4 Connect the stereo earphones to the ∩ jack.

(Plug in firmly.)

R L

5 Press ▶ ❚❚.

Play now starts.

Track number in play

0:01

Elapsed playing time of each track

Play stops automatically when all the tracks have been played.

6 Adjust the volume level.

(If the unit has been connected to the car audio system, adjust the volume between 4 and 6 on the unit, then adjust the volume level on the system.)

Removing the disc

After the disc has stopped rotating, open lid, press PUSH to release the disc. (Do not open the lid during play.)

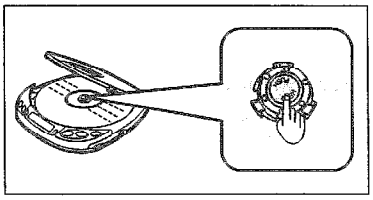

Note

Do not put anything inside the unit.



Automatic Shut-OFF function

When the unit is left for about 10 minutes in the stop or pause mode, this function automatically shuts off the power in order to prevent the batteries, etc. from discharging needlessly.

Operation	Button	Display
Pause: Press during play/press again to resume play	▶ ❚❚	7 0:18
To stop play: Press during play [Stop mode]	■	Total number of tracks 10 44:48 Total playing time
To turn off the unit: Press during stop mode [Off mode]	■	
Skip forward/backward (skip function): Press during play **Rapid forward/backward (search function):** Keep depressed during play	▶▶|: Forward direction |◀◀: Backward direction	——

Skip and search functions

- During program play the tracks are skipped in the forward or backward direction in the programmed sequence.
- During program play, random play or 1-track repeat play, only the track being played is searched.
- During random play, it is not possible to skip to the track which has already been played.

For your reference:

"no dISC" display

This appears for about 30 seconds when a disc has not been inserted or when a disc has not been inserted properly and then ▶ ❚❚ is pressed.

"OPEN" display

This appears for about 10 minutes after the lid is opened. (It does not appear when the unit is turned off.)

1 Press OPEN to open the lid, and insert the disc.

ⓐ Label must face upward.
Press the area near the center hole of the disc until it clicks into position.
ⓑ Close the lid.

2 Release the hold mode.

3 Set MODE to NORMAL.

4 Connect the stereo earphones to the ∩ jack. (Plug in firmly.)

5 Press ▶ ❚❚.

Play now starts.
ⓒ Track number in play
ⓓ Elapsed playing time of each track
Play stops automatically when all the tracks have been played.

6 Adjust the volume level.

(If the unit has been connected to the car audio system, adjust the volume level between 4 and 6 on the unit, then adjust the volume level on the system.)

For your reference:

"no dISC" display

This appears for about 30 seconds when a disc has not been inserted or when a disc has not been inserted properly and then ▶ ❚❚ is pressed.

"OPEN" display

This appears for about 10 minutes after the lid is opened. (It does not appear when the unit is turned off.)

Automatic Shut-OFF function

When the unit is left for about 10 minutes in the stop or pause mode, this function automatically shuts off the power in order to prevent the batteries, etc. from discharging needlessly.

■ To temporarily stop disc play [A]

Press ▶ ❚❚ during play.
Press again to resume play.

■ To stop play [B]

Press ■/POWER OFF during play.
[Stop mode]
ⓐ Total number of tracks
ⓑ Total playing time

■ To turn off the unit [D] (⏻)

Press ■/POWER OFF during stop mode.
[Off mode]

- The batteries can be used for about 10 months (300 times) if they are used every day. They will need to be replaced if the duration of their operation drops drastically.
- You can operate the unit with the AC adaptor while recharging the batteries, but it will lengthen the recharging time.
- Recharging should be performed at 5°C~40°C.
- While recharging, the AC adaptor and rechargeable batteries may get warm. This is normal.

Using the dry cell batteries (not included)

Disconnect the AC adaptor and then install two LR6 (UM-3) type alkaline batteries.
The batteries are inserted and removed in the same way as for the rechargeable batteries.

Using the AC adaptor

Connect the AC adaptor supplied.
Refer to the section on "Using the rechargeable batteries" for details on the connections.

Note
The unit is in the standby condition when the AC adaptor is connected. The primary circuit is always "live" as long as the AC adaptor is connected to an electrical outlet.

Using the car adaptor

Be sure to obtain the car adaptor (SH-CDC9), available as an optional accessory.
The batteries can be recharged inside the car using the car adaptor.

Battery indicator

ⓐ Battery indicator
It starts flashing when the batteries have run down. After a short while the power is automatically cut off.
(The amount of time the unit will continue to play after the indicator has started flashing differs slightly, depending on the type of batteries used.)

Type of battery	Action
Rechargeable batteries	Recharge the batteries again.
Dry cell batteries	Replace with new batteries.

(The battery indicator may not flash if rechargeable batteries, other than those designated by Panasonic, are used.)

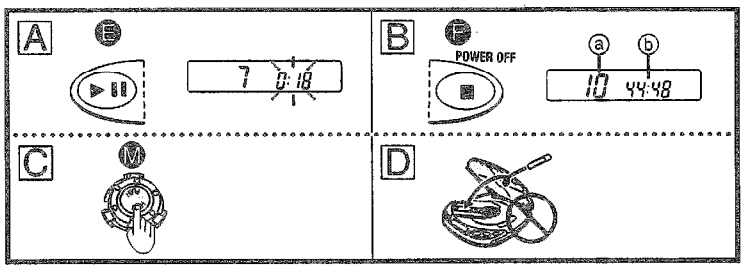

■ Removing the disc C

After the disc has stopped rotating, open lid, press PUSH to release the disc. (Do not open the lid during play.)

Note D
Do not put anything inside the unit.

Skip function (skip forward/backward) A

Press ⏮ or ⏭ during play.

- During program play the tracks are skipped in the forward or backward direction in the programmed sequence.
- During random play, it is not possible to skip to the track which has already been played.

Search function (rapid forward/backward) A

Keep depressed ⏮ or ⏭ during play.

- During program play, random play or 1-track repeat play, only the track being played is searched.

⏮: Backward direction	⏭: Forward direction



USING THE UNIT WITH OPTIONAL ACCESSORIES

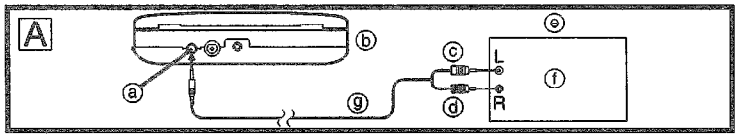

Using the unit with an audio system A

Using the stereo connection cable (not included), you can hear CDs on your audio system.

- Connect the cable to the amplifier after turning off its power.
- Do not connect the cable to the PHONO jacks on the amplifier.
- Obtain the optional connecting cable if the amplifier comes with mini-phone jacks.
- Adjust the volume level on the amplifier.

ⓐ OUT jack
ⓑ Back panel of the unit
ⓒ (White)
ⓓ (Red)
ⓔ Amplifer
ⓕ To CD or AUX terminals
ⓖ Stereo connection cable

Using the unit with a car audio system

Items to be purchased

For connection to the car audio system:
Car stereo cassette adaptor (SH-CDM9D)
For securing the unit and connecting the power supply:

- Car adaptor (SH-CDC9)
- Car Mount Kit (SH-CDF7)
  Car mounting arm, Car insulator

Note
It may not be possible to use the unit with some types of car audio systems owing to restrictions imposed by the construction of the car stereo cassette adaptor or Car Mount Kit.
For further details, refer to the instructions of the part concerned.

CAUTIONS

AC adaptor

- Handle the AC adaptor carefully. Improper handling is dangerous.
  - Do not touch it with wet hands.
  - Do not place heavy objects on top of it.
  - Do not forcibly bend it.
- Be sure to connect only the AC adaptor provided with the unit.
- Disconnect the AC adaptor from the power outlet if the unit is not going to be used for a long time.

Unit

No altering or remodeling
This can cause malfunctioning.

No dropping or strong impacts
This may damage the unit.

Locations to be avoided
Avoid using the unit in the following locations since they can cause malfunctioning.

1. Bathrooms and other moisture-prone places
2. Warehouses and other dusty places
3. Very hot places near heating appliances, etc.

Do not leave the unit exposed to direct sunlight for long periods of time.
This may deform or discolor the cabinet and may also cause malfunctioning.

Rechargeable batteries

- Only the RP-BP60 (SH-CDB8D) batteries can be recharged.
- If the power delivered by the batteries lasts for a very short time after recharging, it means that the batteries' service life is over. Do not use them any more, please replace the batteries.
- Recharging already charged batteries will shorten their service life.
- When recharging batteries for the first time or when they have not been used for a long period of time, the play time may be shorter than usual. In a case like this, repeatedly recharge and discharge the batteries. This will restore them to their regular charged state.
- Do not allow any metal objects to touch the terminals of rechargeable batteries since this may cause short-circuiting which is dangerous.
- Do not peel off the plastic covering on the rechargeable batteries. Short-circuiting may occur, which is dangerous.

Dry cell batteries/rechargeable batteries

To prevent damage to the batteries and electrolyte leakage, heed the following points into the unit.

- Align the ⊕ and ⊖ polarities properly when inserting the batteries.
- Do not mix different types or makes of batteries or old and new batteries.
- Remove the batteries if you do not plan to use the unit for an extended period of time.
- Do not throw batteries into a fire, and do not short-circuit, disassemble or subject them to excessive heat.
- Do not attempt to recharge dry cell batteries.

Carrying dry cell batteries or rechargeable batteries around

When putting dry cell or rechargeable batteries in a pocket or bag, ensure that no other metal objects, such as a necklace, are placed in the pocket or bag with them. Contact with metal may cause short-circuiting which, in turn, may cause a fire.
Be absolutely sure to carry the rechargeable batteries in the battery carrying case.

When driving a car

For safety reasons, do not operate the unit while driving.

Precautions for Listening with the Headphones

- Do not play your headset at a high volume. Hearing experts advise against continuous extended play.
- If you experience a ringing in your ears, reduce volume or discontinue use.
- Do not use while operating a motorized vehicle. It may create a traffic hazard and is illegal in many areas.
- You should use extreme caution or temporarily discontinue use in potentially hazardous situations.
- Even if your headset is an open-air type designed to let you hear outside sounds, don't turn up the volume so high that you can't hear what's around you.

When purchasing rechargeable batteries [A]

As a safety precaution, the portable CD players made by our company have a construction designed to make it impossible to recharge ordinary batteries.
To use rechargeable batteries, be absolutely sure to purchase the rechargeable Ni-Cd batteries designed especially for this unit.
Special rechargeable NI-Cd batteries:
SH-CDB8D (set of 2)
For details, check with your dealer.

ⓐ Special rechargeable batteries
ⓑ Ordinary dry cell batteries/rechargeable batteries

[For (E, EB) areas.]

Notice about the rechargeable battery
The battery is designated recyclable.
Please follow your local recycling regulations.



■ HANDLING PRECAUTIONS FOR TRAVERSE DECK

The laser diode in the traverse deck (optical pickup) may break down due to potential difference caused by static electricity of clothes or human body.
So, be careful of electrostatic breakdown during repair of the traverse deck (optical pickup).

● Handling of traverse deck (optical pickup)

1. Do not subject the traverse deck (optical pickup) to static electricity as it is extremely sensitive to electrical shock.
2. The short land between the No. ④ (LD) and No. ⑤ (GND) pins on the flexible board (FFC) is shorted with a solder build-up to prevent damage to the laser diode.
   To connect to the PC board, be sure to open by removing the solder build-up, and finish the work quickly.
3. Take care not to apply excessive stress to the flexible board (FFC).
4. Do not turn the variable resistor (laser power adjustment). It has already been adjusted.

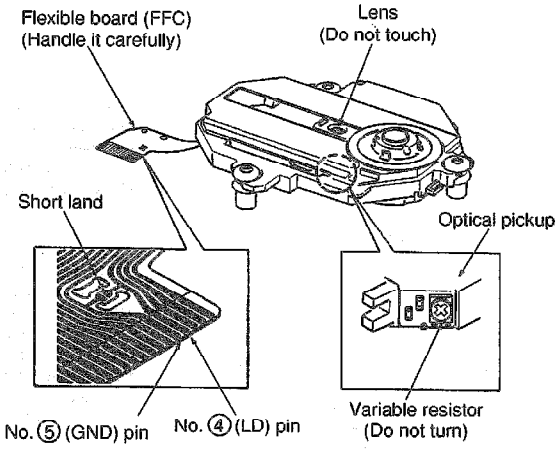

● Grounding for electrostatic breakdown prevention

1. Human body grounding
   Use the anti-static wrist strap to discharge the static electricity from your body.
2. Work table grounding
   Put a conductive material (sheet) or steel sheet on the area where the optical pickup is placed, and ground the sheet.

Caution:

The static electricity of your clothes will not be grounded through the wrist strap. So, take care not to let your clothes touch the traverse deck (optical pickup).

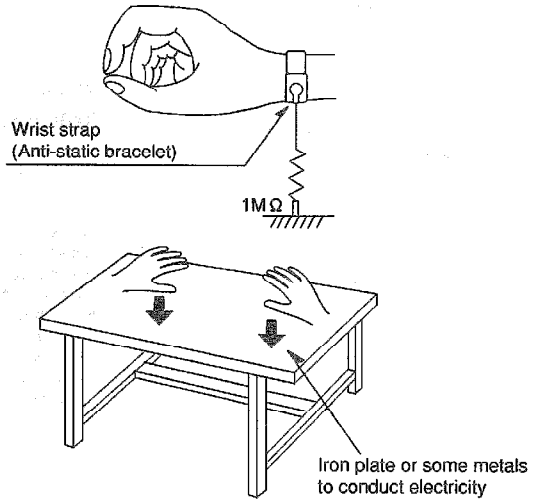

OPERATION CHECKS AND MAIN COMPONENT REPLACEMENT PROCEDURES

Warning: This product uses a laser diode. Refer to caution statements on page 2.
ACHTUNG: • Die lasereinheit nicht zerlegen.
• Die lasereinheit dart nur gegen eine vom hersteller speziferte einheit ausgetauscht werden.

NOTE

1. **This section describes procedures for checking the operation of the major printed circuit boards and replacing the main components.**
2. **For reassembly after operation checks or replacement, reverse the respective procedures. Special reassembly procedures are described only when required.**
3. **Illustrated screws are equivalent to actual size.**
4. **[ ] indicates parts No.**

1. Checking for the P.C.B.

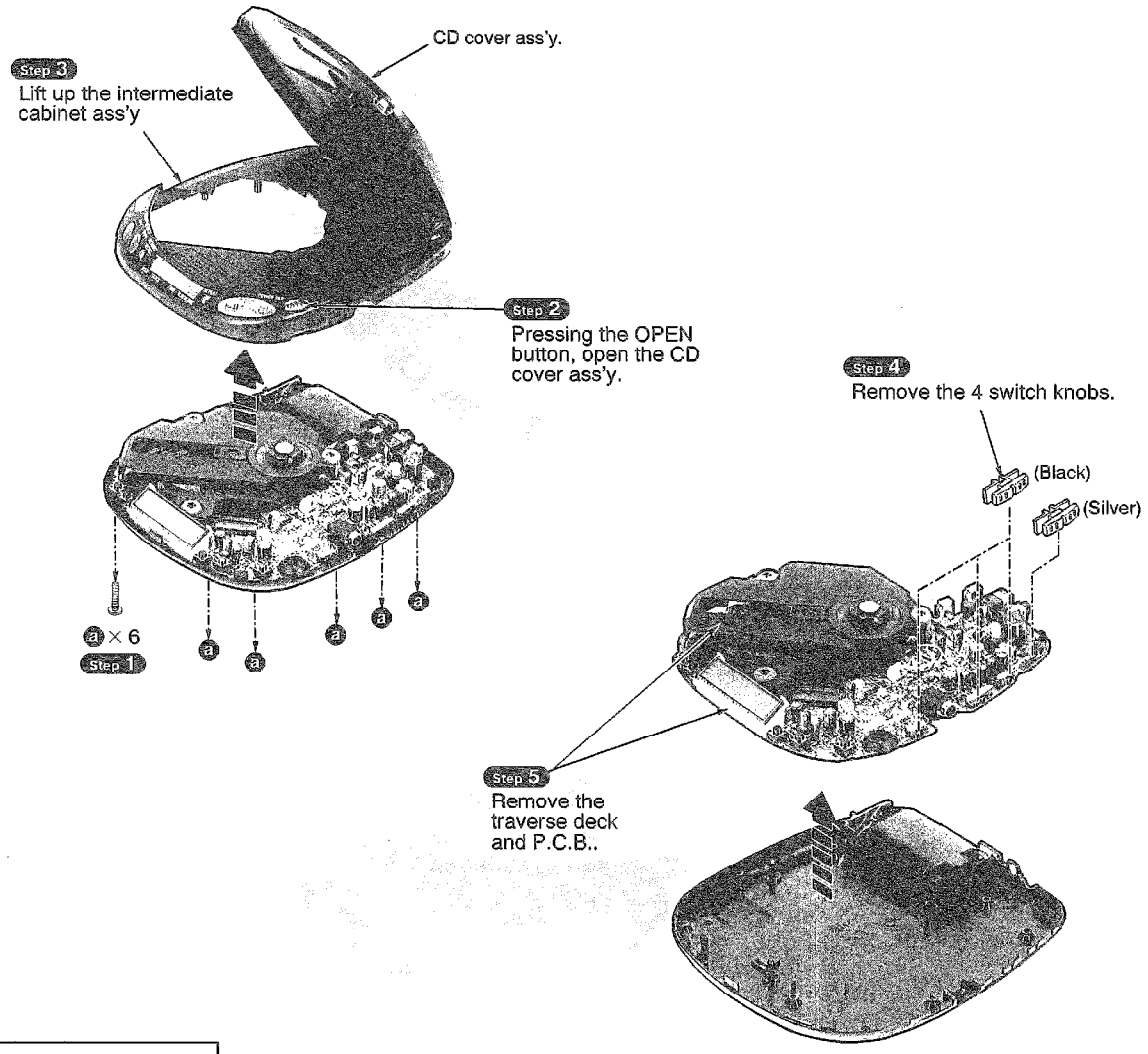

a [XTN17+6GFZ] (Black)

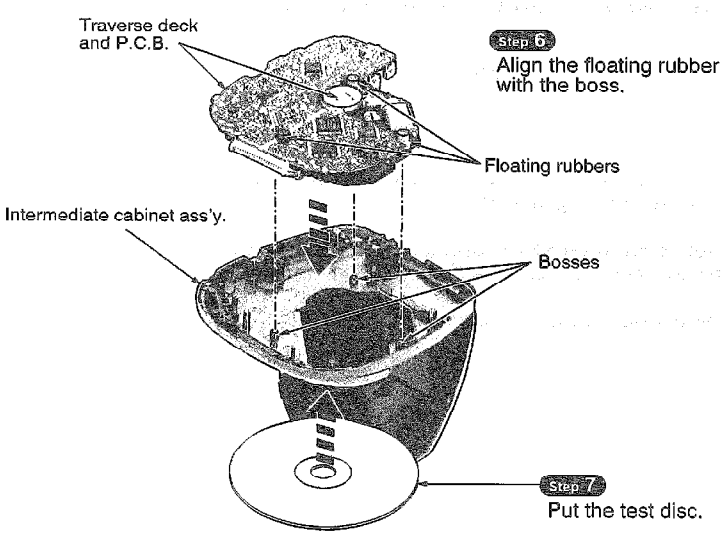

• **Check the P.C.B. (Solder side) as shown below.**

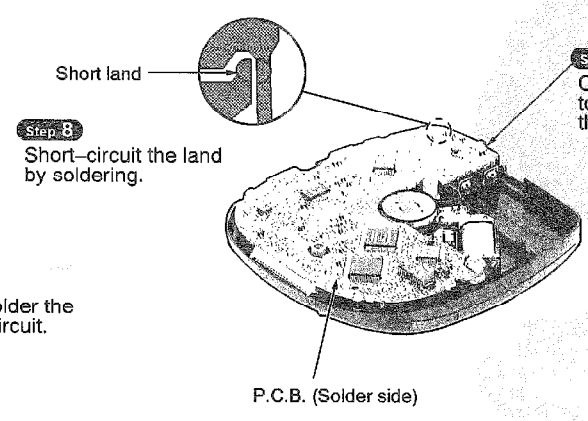
Short land
Step 9
Connect the AC adaptor to the DC IN jack, and then apply DC power.
Step 8
Short-circuit the land by soldering.
P.C.B. (Solder side)

NOTE
After checking, unsolder the short land to open circuit.

2. Replacement for the traverse deck

• Follow the Step 1 ~ Step 3 in item 1.

NOTE
Solder the point between pin 4 (LD) and pin 5 (GND) of FFC board. (Refer to "Handing Precautions for Traverse Deck" on page 7.)

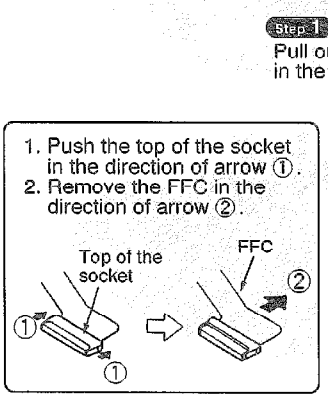

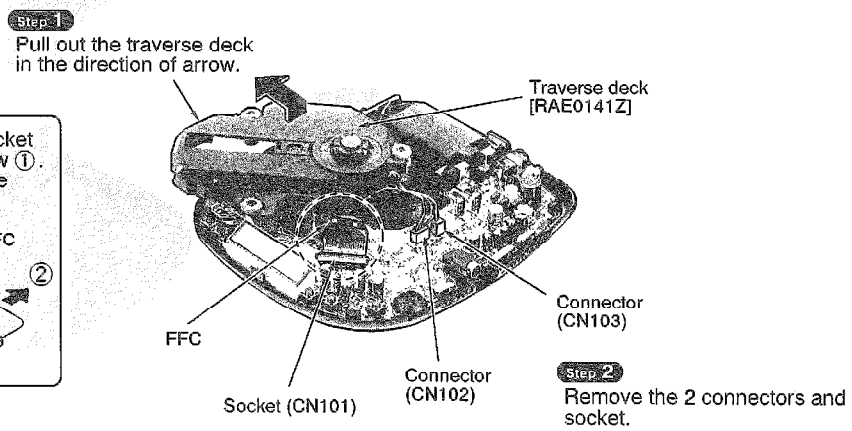

3. Replacement for the CD cover ass'y

• Follow the Step 1 ~ Step 3 in item 1.

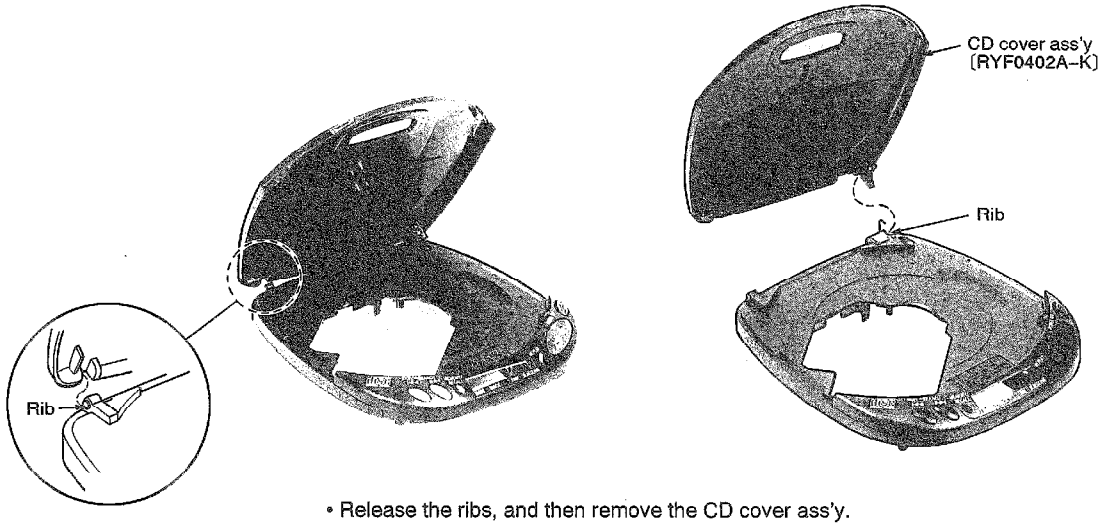

• Release the ribs, and then remove the CD cover ass'y.

● Terminal guide of IC's, transistors and diodes

NJU7082AMTE1	8PIN
AN8837SBE1	28PIN



AN8788FB	44PIN
SM5856A1F	44PIN
MN662745RPC	80PIN



SC440301FU



LH6456K2



FMW1T98
FMG4T148



2SD1450STTA



2SB709QRSTX



2SB970RSTX
2SD1328RSTTX
2SD1819QRSTX
DTA143TUT107
UN5113TX
UN5114TX
UN5211TX
UN5215TX

2SD2074HWRST



MA151WKTX



MA8047MTX
MA8051MTX



1SS355TE17



SS14G11



CHECKING THE OPERATION PROBLEMS ON THE TRAVERSE DECK (OPTICAL PICKUP)

Make sure to follow the procedures below to check the operation problems of the traverse deck (optical pickup) before replacing it. Replace the traverse deck only after the problem is identified.

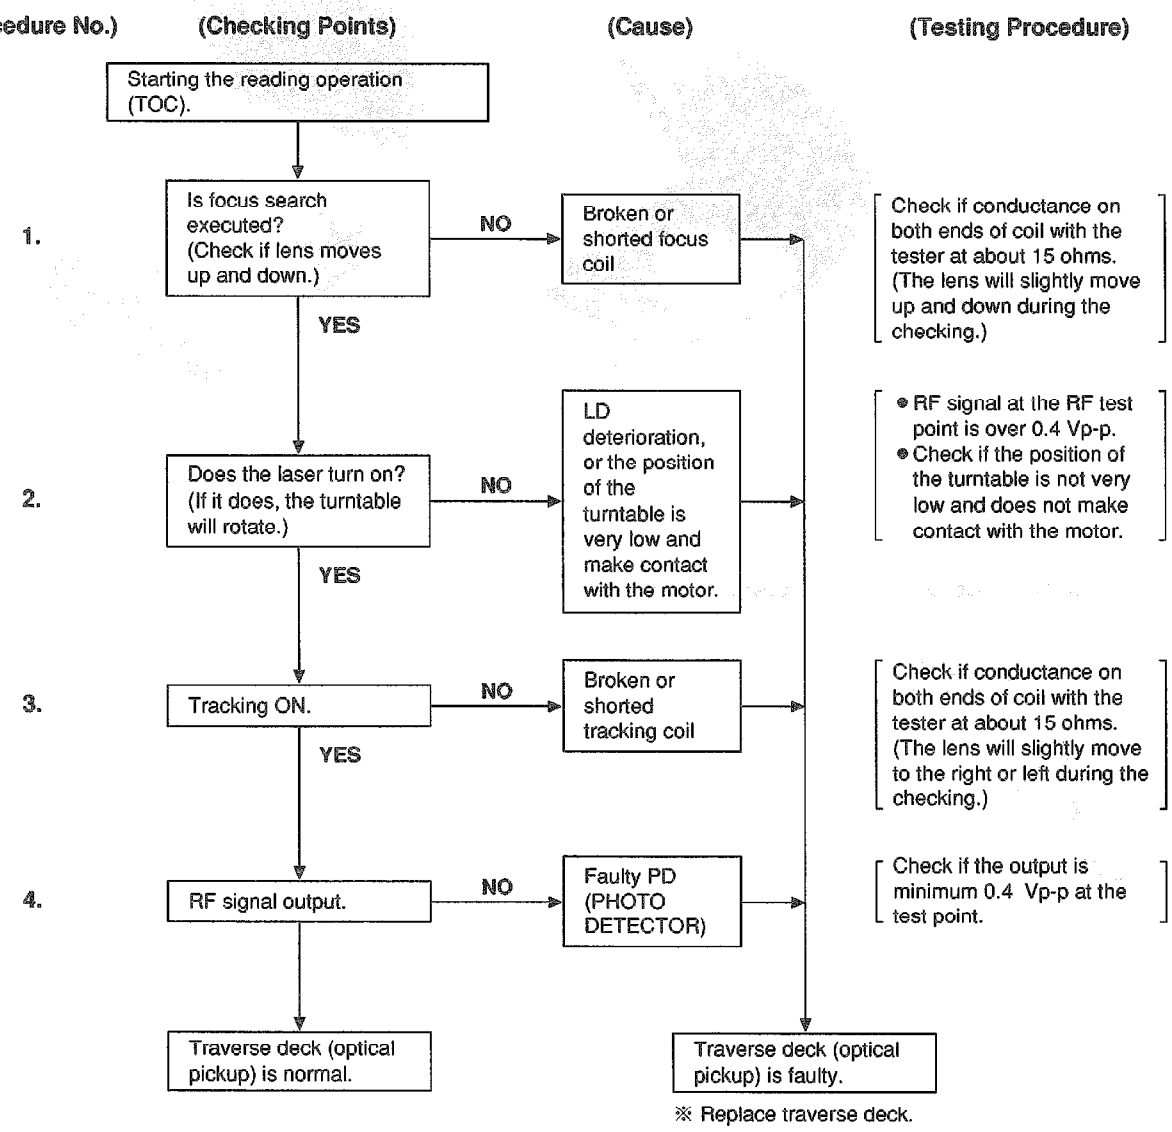
(Procedure No.)
(Checking Points)
(Cause)
(Testing Procedure)
Starting the reading operation (TOC).
1.
Is focus search executed? (Check if lens moves up and down.)
NO
Broken or shorted focus coil
Check if conductance on both ends of coil with the tester at about 15 ohms. (The lens will slightly move up and down during the checking.)
YES
2.
Does the laser turn on? (If it does, the turntable will rotate.)
NO
LD deterioration, or the position of the turntable is very low and make contact with the motor.
• RF signal at the RF test point is over 0.4 Vp-p.
• Check if the position of the turntable is not very low and does not make contact with the motor.
YES
3.
Tracking ON.
NO
Broken or shorted tracking coil
Check if conductance on both ends of coil with the tester at about 15 ohms. (The lens will slightly move to the right or left during the checking.)
YES
4.
RF signal output.
NO
Faulty PD (PHOTO DETECTOR)
Check if the output is minimum 0.4 Vp-p at the test point.
Traverse deck (optical pickup) is normal.
Traverse deck (optical pickup) is faulty.
※ Replace traverse deck.

- Check electrical circuit.
- Check for flaws on disc or if it is warped or not centered.

• Check the operations described below on the traverse deck after replacing it.

* Checking Skip Search

1. Play an ordinary musical program disc.
2. Press the skip button to check for normal skip search operation (in both the forward and reverse directions).

* Checking Manual Search

1. Play an ordinary musical program disc.
2. Press the manual search button to check for smooth manual search operations at either low or high speed (in both the forward and reverse directions).

* Checking Playability

1. Play the 0.7 mm black dot and the 0.7 mm wedge on the playability test disc (SZZP1054C) and verify that no sound skip or noise occurs.
2. Play the middle tracks of the uneven test disc (SZZP1056C) and verify that no sound skip or noise occurs.

■ AUTOMATIC ADJUSTMENT RESULTS DISPLAY FUNCTION (SELF-CHECK FUNCTION)

On this unit (SL-XP240), each automatic adjustment result are displayed on the LCD. This function is convenient to check or identify which automatic adjustment circuit is incorrect. The followings are the contents of the automatic adjustment result displays (self-check function).

• How to display automatic adjustment results

1. Load the test disc (SZZP1054C).
2. Press the ⏮ (SKIP/SEARCH) and ⏭ (SKIP/SEARCH) Buttons simultaneously and hold them, and additionally press the ▶ / ⏸ (PLAY/PAUSE) Button.
3. Press the ■ (STOP/POWER OFF) Button once.
4. An automatic adjustment result is displayed on the LCD.

• Display of automatic adjustment results (self-check function)

LCD Display

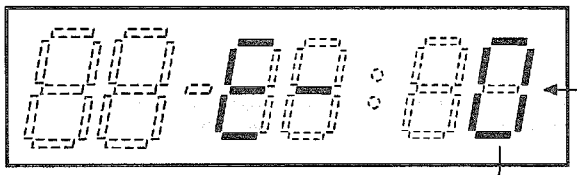

4 bits (TGC, FGC, TBC, FBC) are displayed in hexadecimal system from 0~F.

〈Example〉

MSB			LSB
TGC	FGC	TBC	FBC

(Each bit ... TGC, FGC, TBC, FBC)
0 ... OK
1 ... NG

1) 0 0 0 0 ⇨ "E—0" is displayed.
(All adjustments are OK.) ..... Normal

2) 0 0 0 1 ⇨ "E—1" is displayed.
(OK) (OK) (OK) (NG)
(Focus balance adjustment is NG (incorrect.))

3) 0 1 0 0 ⇨ "E—4" is displayed.
(OK) (NG) (OK) (OK)
(Focus gain adjustment is NG.)

4) 1 1 1 1 ⇨ "E—F" is displayed.
(All adjustments are NG.)

5) 1 0 0 0 ⇨ "E—8" is displayed.
(NG) (OK) (OK) (OK)
(Tracking gain adjustment is NG.)

Note: If any other disc than the test disc (SZZP1054C) is used, an "E—8" may be displayed.

〈Example〉 **Follow the below steps when "E−1" is displayed.**

(Cause: Focus balance (FBC) is set beyond the limit.)
- Check if

(1) the waveform or voltage of the focus servo circuit is correct, and
(2) the optical pickup returns to the normal state by exchanging the traverse deck.

Follow the below steps when "E−4" is displayed.

(Cause: Focus gain (FGC) is set beyond the limit.)
- Check if

(1) the waveform or voltage of the focus servo circuit is correct,
(2) the focus coil of the optical pickup is correct (around 15 ohms), and
(3) the optical pickup returns to the normal state by exchanging the traverse deck.

Follow the below steps when "E−F" is displayed.

(Cause : All adjustments (TGC, FGC, TBC, FBC) are set beyond the limit.)
- Check if

(1) the optical pickup returns to the normal state by exchanging the traverse deck, and
(2) the waveform or voltage of the servo IC's (IC101, 501) are correct.

Note:
It is not always necessary to exchange the traverse deck when an error message is displayed. Be sure to check if the circuit is defective or not before exchanging the traverse deck.

Note:
If any other disc than the test disc (SZZP1054C) is used, an error message may be displayed. This is not a malfunction.

MEASUREMENTS AND ADJUSTMENTS

Warning: This product uses a laser diode. Refer to caution statements on page 2.
ACHTUNG:
- Die lasereinheit nicht zerlegen.
- Die lasereinheit darf nur gegen eine vom hersteller spezifizierte einheit ausgetauscht werden.

• Measuring instruments and special tools

- **Test discs**
  1. Playability test disc (SZZP1054C)
  2. Uneven test disc (SZZP1056C)
- Musical program disc (ordinary)
- DC voltmeter
- Lead wire (for test points)

• Test short land

Short-circuit the lands of the laser ON/OFF switch (S201) by soldering them. It turns "ON" position. (Refer to below **Fig. 1** or printed circuit board and wiring connection diagram for short land location on page 25.)

Note: Remove the solders from the lands after adjustment.

• Adjustment point

Notes: 1. Please refer to the printed circuit board and wiring connection diagram for test point locations.
2. Take care to connect CN101, as shown in **Fig. 1**.

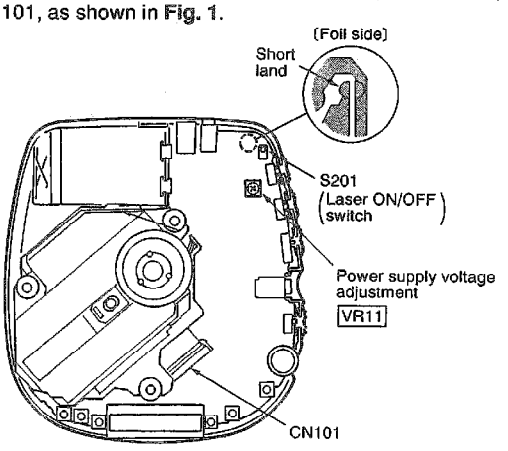

Fig. 1

• Adjustment procedure

(1) POWER SUPPLY VOLTAGE ADJUSTMENT

1. Connect the DC voltmeter to TP2 (VCC) (+) and TP3 (GND) on the P.C.B.
2. Connect the AC adaptor cord to the DC (IN) port and move the PLAY switch to the ON position.
   (Use a new dry cell battery or a rechargeable battery that is full charged.)
3. Insert the test disc, and switch the player power ON.
4. Adjust **VR11** on the P.C.B. at **3.32±0.02 V**, as shown in **Fig. 1**.

(2) CHECK OF PLAY OPERATION

***Checking Skip Search**

1. Play an ordinary musical program disc.
2. Press the skip button to check for normal skip search operation (in both the forward and backward directions).

***Checking Manual Search**

1. Play an ordinary musical program disc.
2. Press the manual search button to check for smooth manual search operations at either low or high speed (in both the forward and backward directions).

***Checking Playability**

1. Play the 0.7 mm black dot and the 0.7 mm wedge on the playability test disc (SZZP1054C) and verify that no sound skip or noise occurs.
2. Play the middle tracks of the uneven test disc (SZZP1056C) and verify that no sound skip or noise occurs.

• Automatic adjustment

On our conventional type portable CD player, there were mounted 6 semi-fixed controls for each adjustment. Since the SL-XP240 servo circuit is equipped with an automatic adjusting circuit, these controls are removed from SL-XP240.

On conventional portable CD player Use for Old Servo IC (AN8373SE2, AN8374SE2)		**On SL-XP240** Use for New Servo IC (AN8837SBE1, MN662745RPC)
1. Tracking Offset Adjustment VR (TOC)	➡	Non Adjustment
2. Focus Offset Adjustment VR (FOC)		
3. Tracking Gain Adjustment VR (TGC)	➡	Automatic Adjusting Circuit
4. Focus Gain Adjustment VR (FGC)		
5. Tracking Balance Adjustment VR (TBC)		
6. Focus Balance Adjustment VR (FBC)		
Total 6 Adjustment VRs	➡	No Adjustment VR

Although all discs are manufactured according to the same specifications, their characteristics are not always precisely the same because they are produced by different manufacturers in various lots, or have different warp etc.
SL-XP240 automatically controls the servo circuit to obtain optimum performance according to any disc's characteristics. Therefore, no malfunction occurs because of mis-adjustment.

BLOCK DIAGRAM

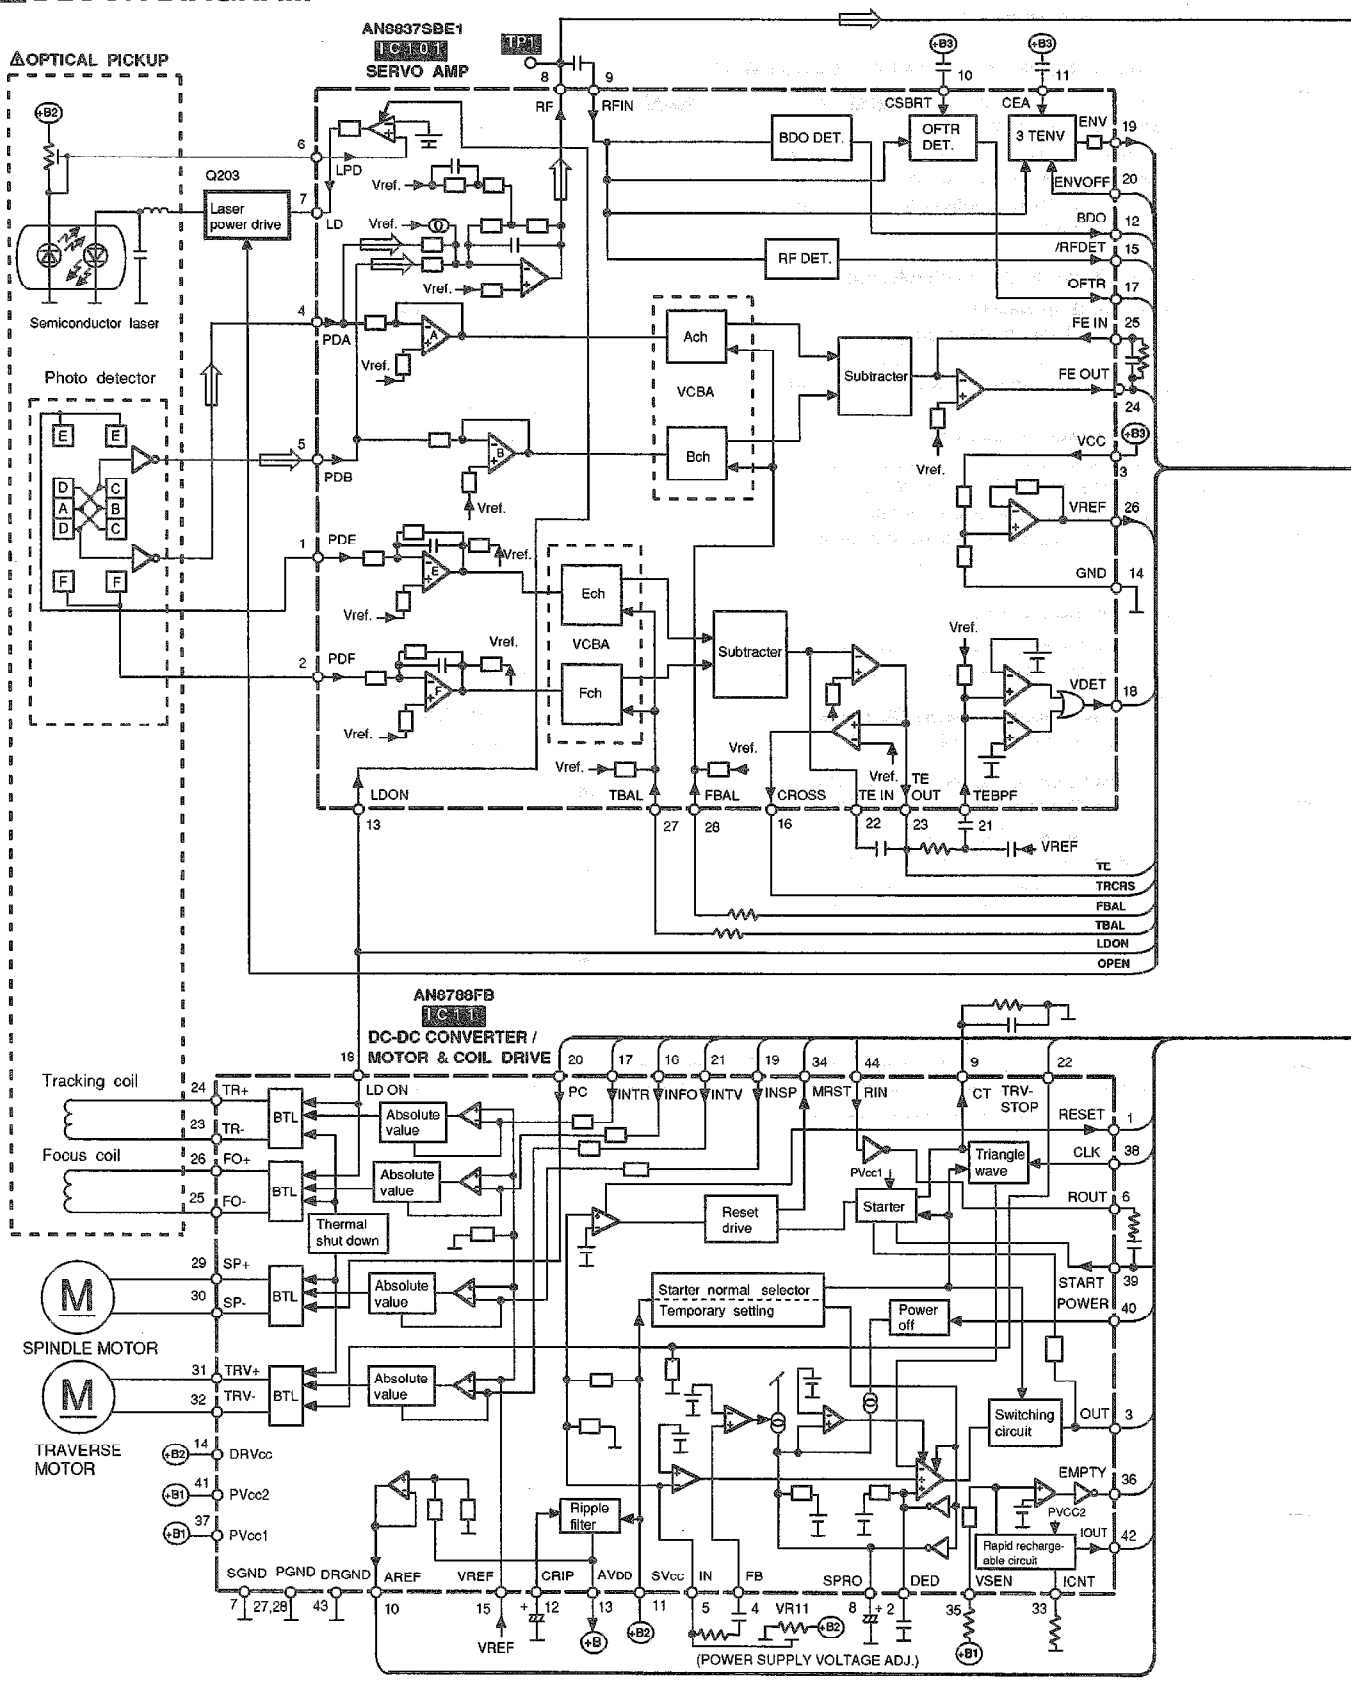

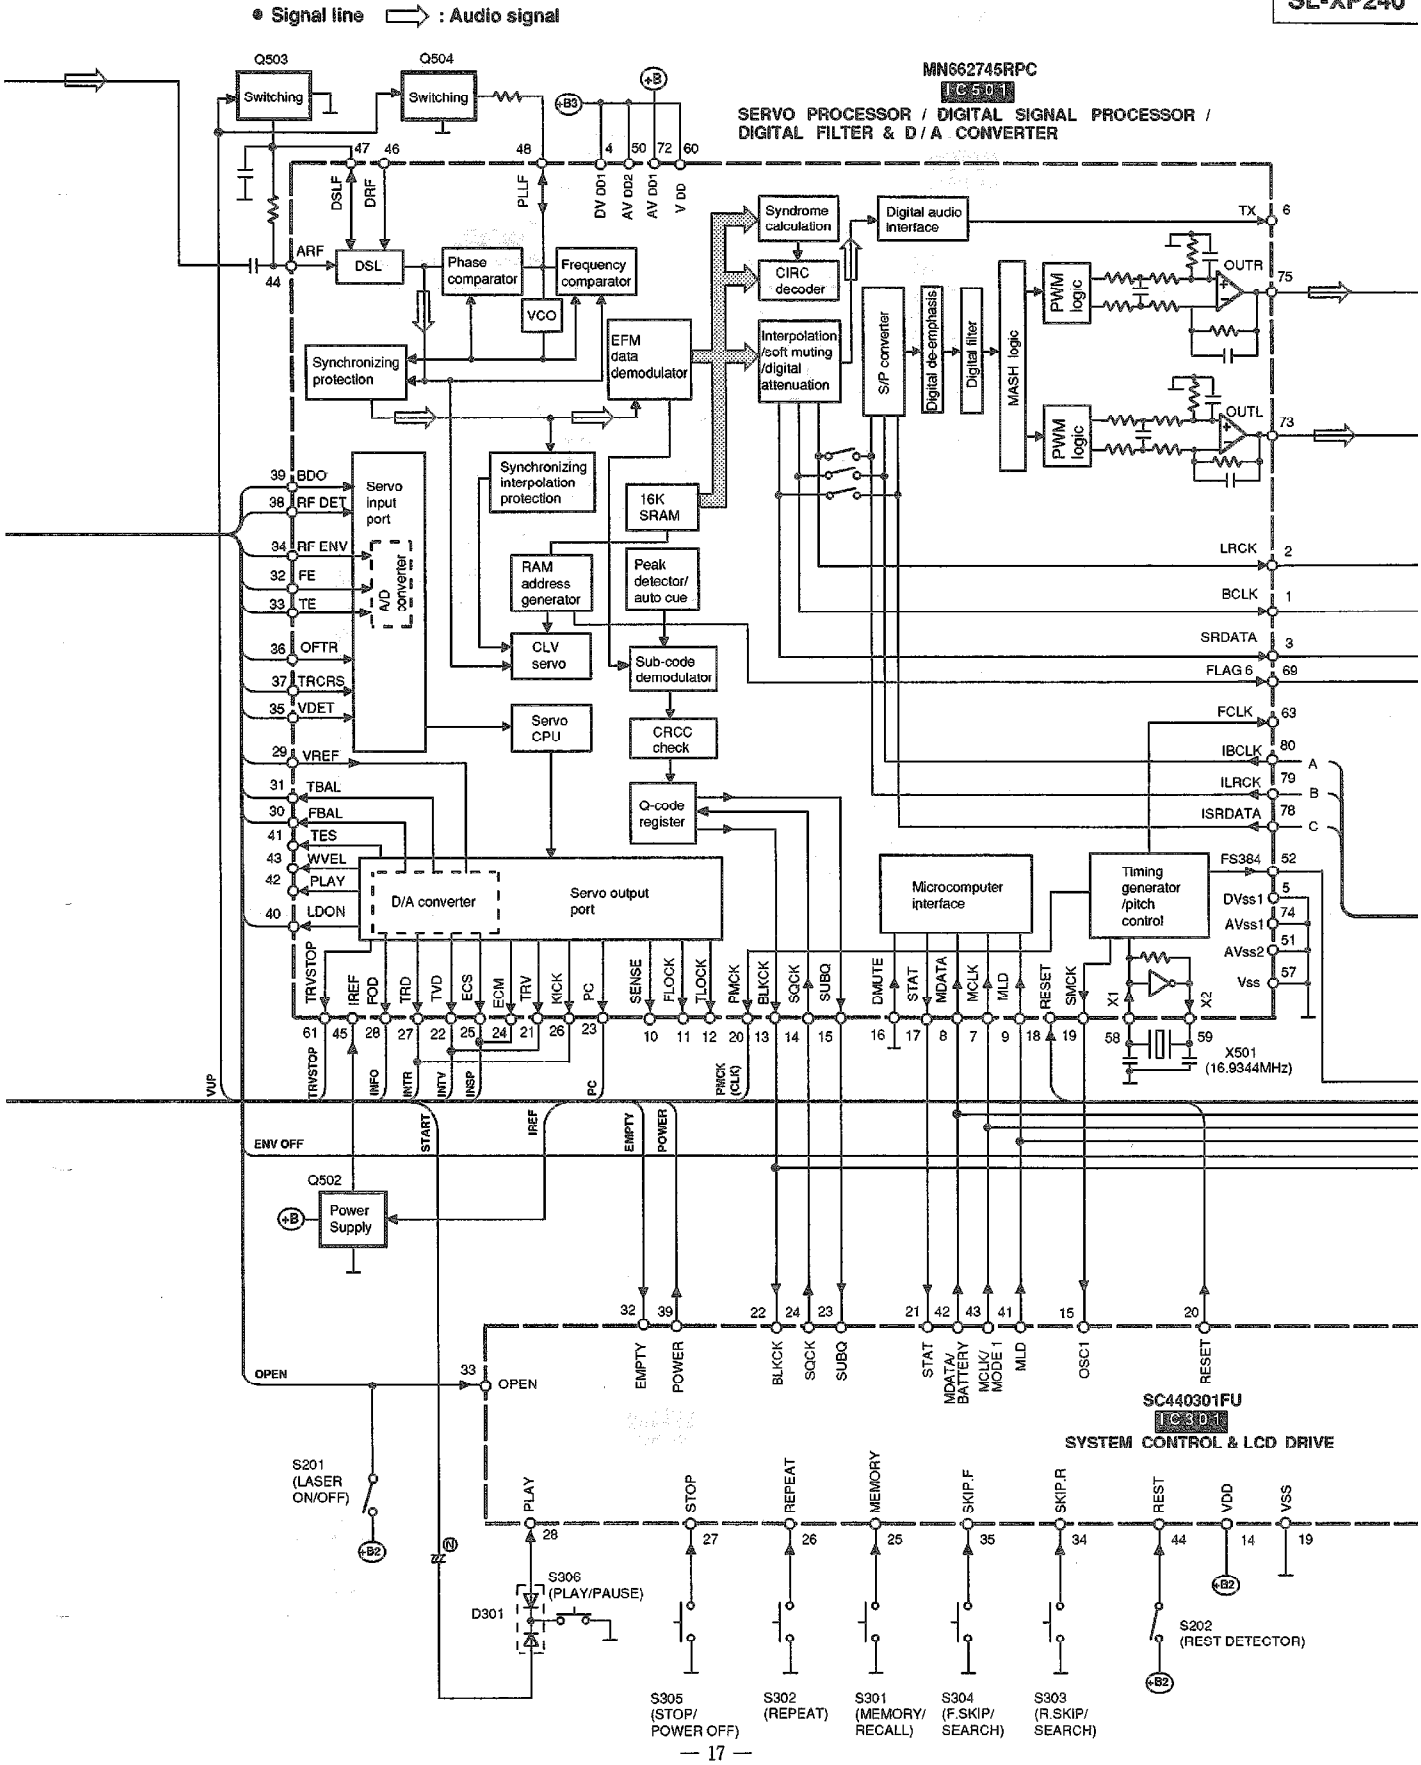
● Signal line ⇨ : Audio signal
MN662745RPC
IC501
SERVO PROCESSOR / DIGITAL SIGNAL PROCESSOR / DIGITAL FILTER & D/A CONVERTER
Q503 Switching
Q504 Switching
+B3
+B
DSLF
DRF
PLLF
DV DD1
AV DD2
AV DD1
V DD
ARF
DSL
Phase comparator
Frequency comparator
VCO
Synchronizing protection
EFM data demodulator
Syndrome calculation
CIRC decoder
Interpolation /soft muting /digital attenuation
S/P converter
Digital de-emphasis
Digital filter
MASH logic
Digital audio interface
PWM logic
OUTR
OUTL
TX
Synchronizing interpolation protection
16K SRAM
RAM address generator
Peak detector/ auto cue
CLV servo
Sub-code demodulator
Servo CPU
CRCC check
Q-code register
Servo input port
A/D converter
BDO
RF DET
RF ENV
FE
TE
OFTR
TRCRS
VDET
VREF
TBAL
FBAL
TES
WVEL
PLAY
LDON
D/A converter
Servo output port
Microcomputer interface
Timing generator /pitch control
LRCK
BCLK
SRDATA
FLAG
FCLK
IBCLK
ILRCK
ISRDATA
FS384
DVss1
AVss1
AVss2
Vss
X1
X2
X501 (16.9344MHz)
TRVSTOP
IREF
FOD
TRD
TVD
ECS
ECM
TRV
KICK
PC
SENSE
FLOCK
TLOCK
PMCK
BLKCK
SQCK
SUBQ
DMUTE
STAT
MDATA
MCLK
MLD
RESET
SMCK
VUP
ENV OFF
START
IREF
EMPTY
POWER
Q502
Power Supply
OPEN
EMPTY
POWER
BLKCK
SQCK
SUBQ
STAT
MDATA/ BATTERY
MCLK/ MODE 1
MLD
OSC1
RESET
SC440301FU
IC301
SYSTEM CONTROL & LCD DRIVE
S201 (LASER ON/OFF)
PLAY
STOP
REPEAT
MEMORY
SKIP.F
SKIP.R
REST
VDD
VSS
S306 (PLAY/PAUSE)
D301
S305 (STOP/ POWER OFF)
S302 (REPEAT)
S301 (MEMORY/ RECALL)
S304 (F.SKIP/ SEARCH)
S303 (R.SKIP/ SEARCH)
S202 (REST DETECTOR)

• Signal line ⇨ : Audio signal

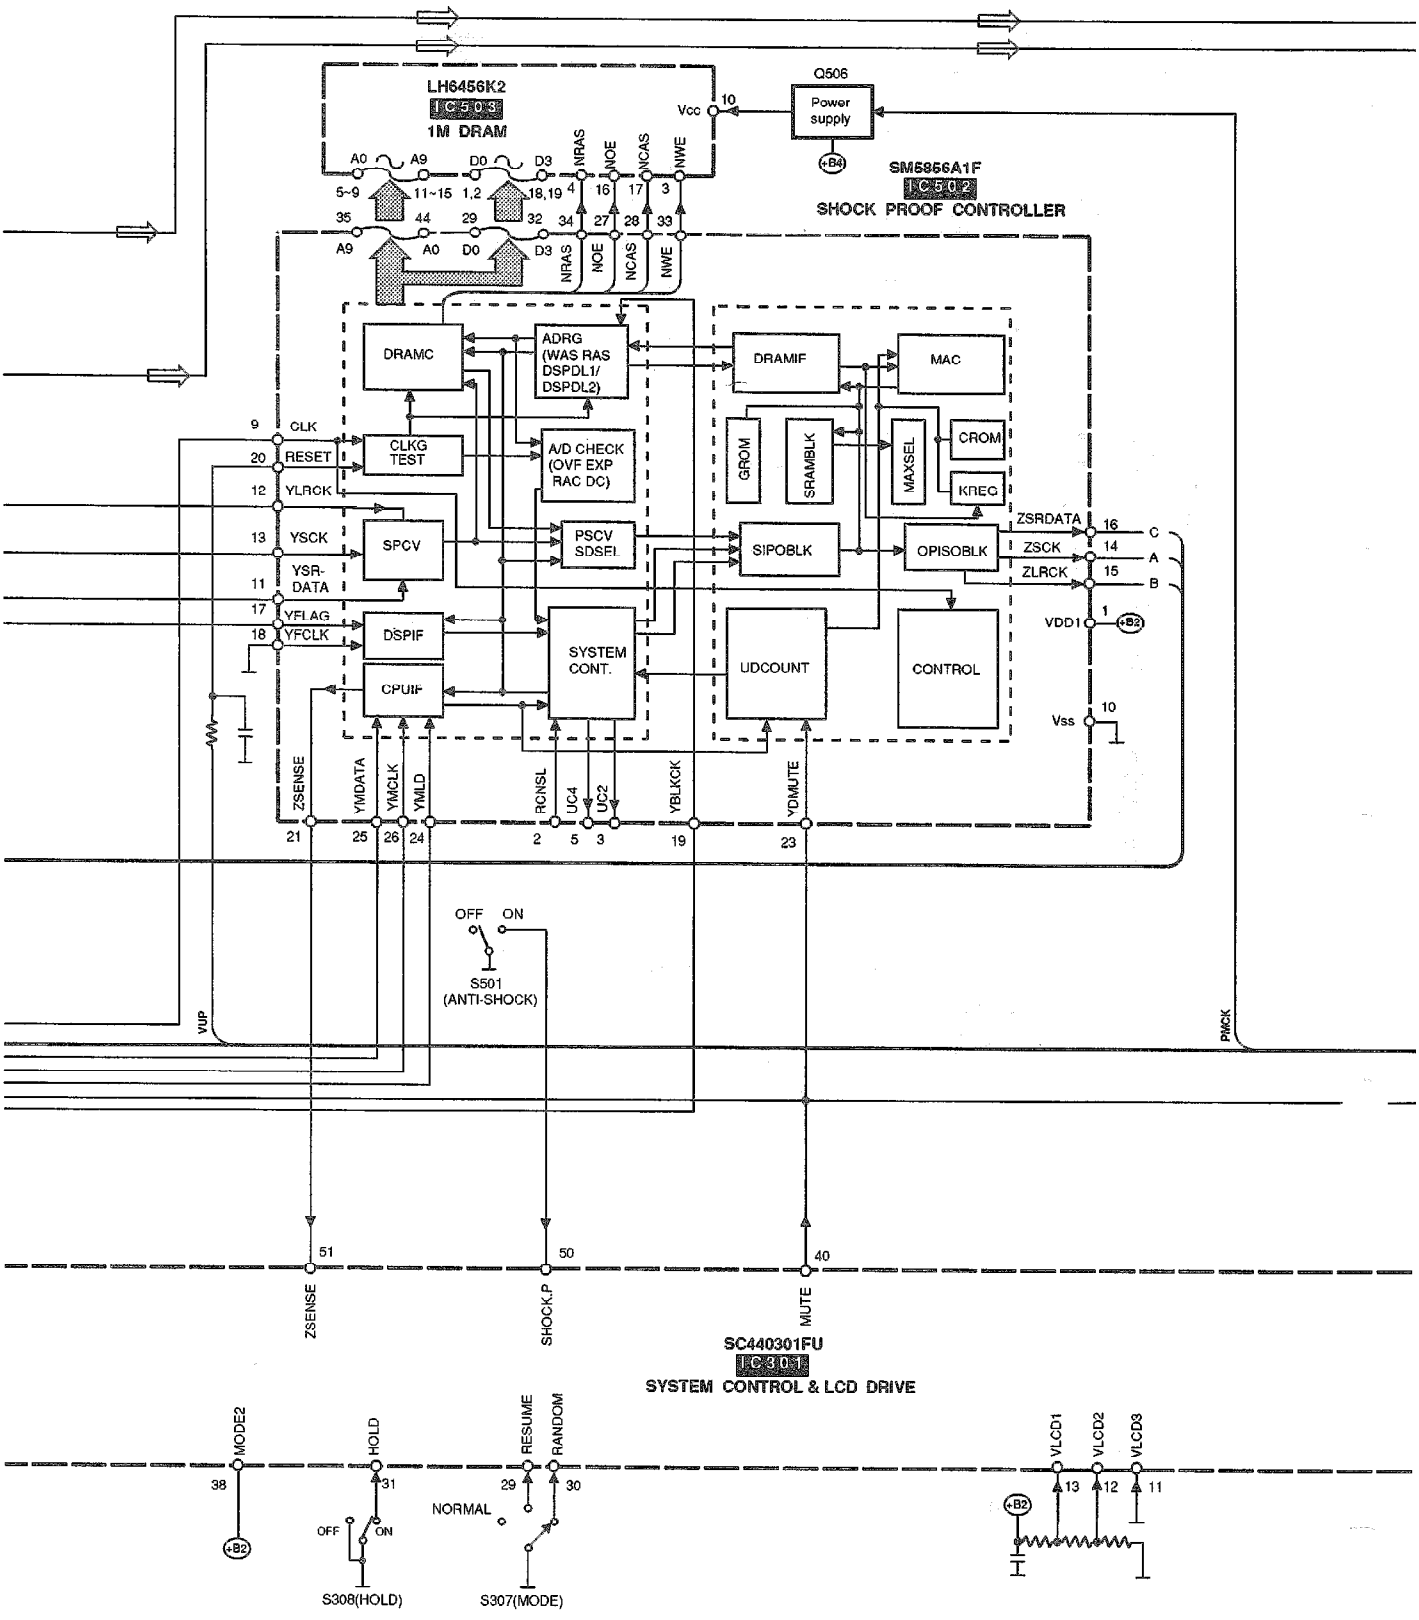

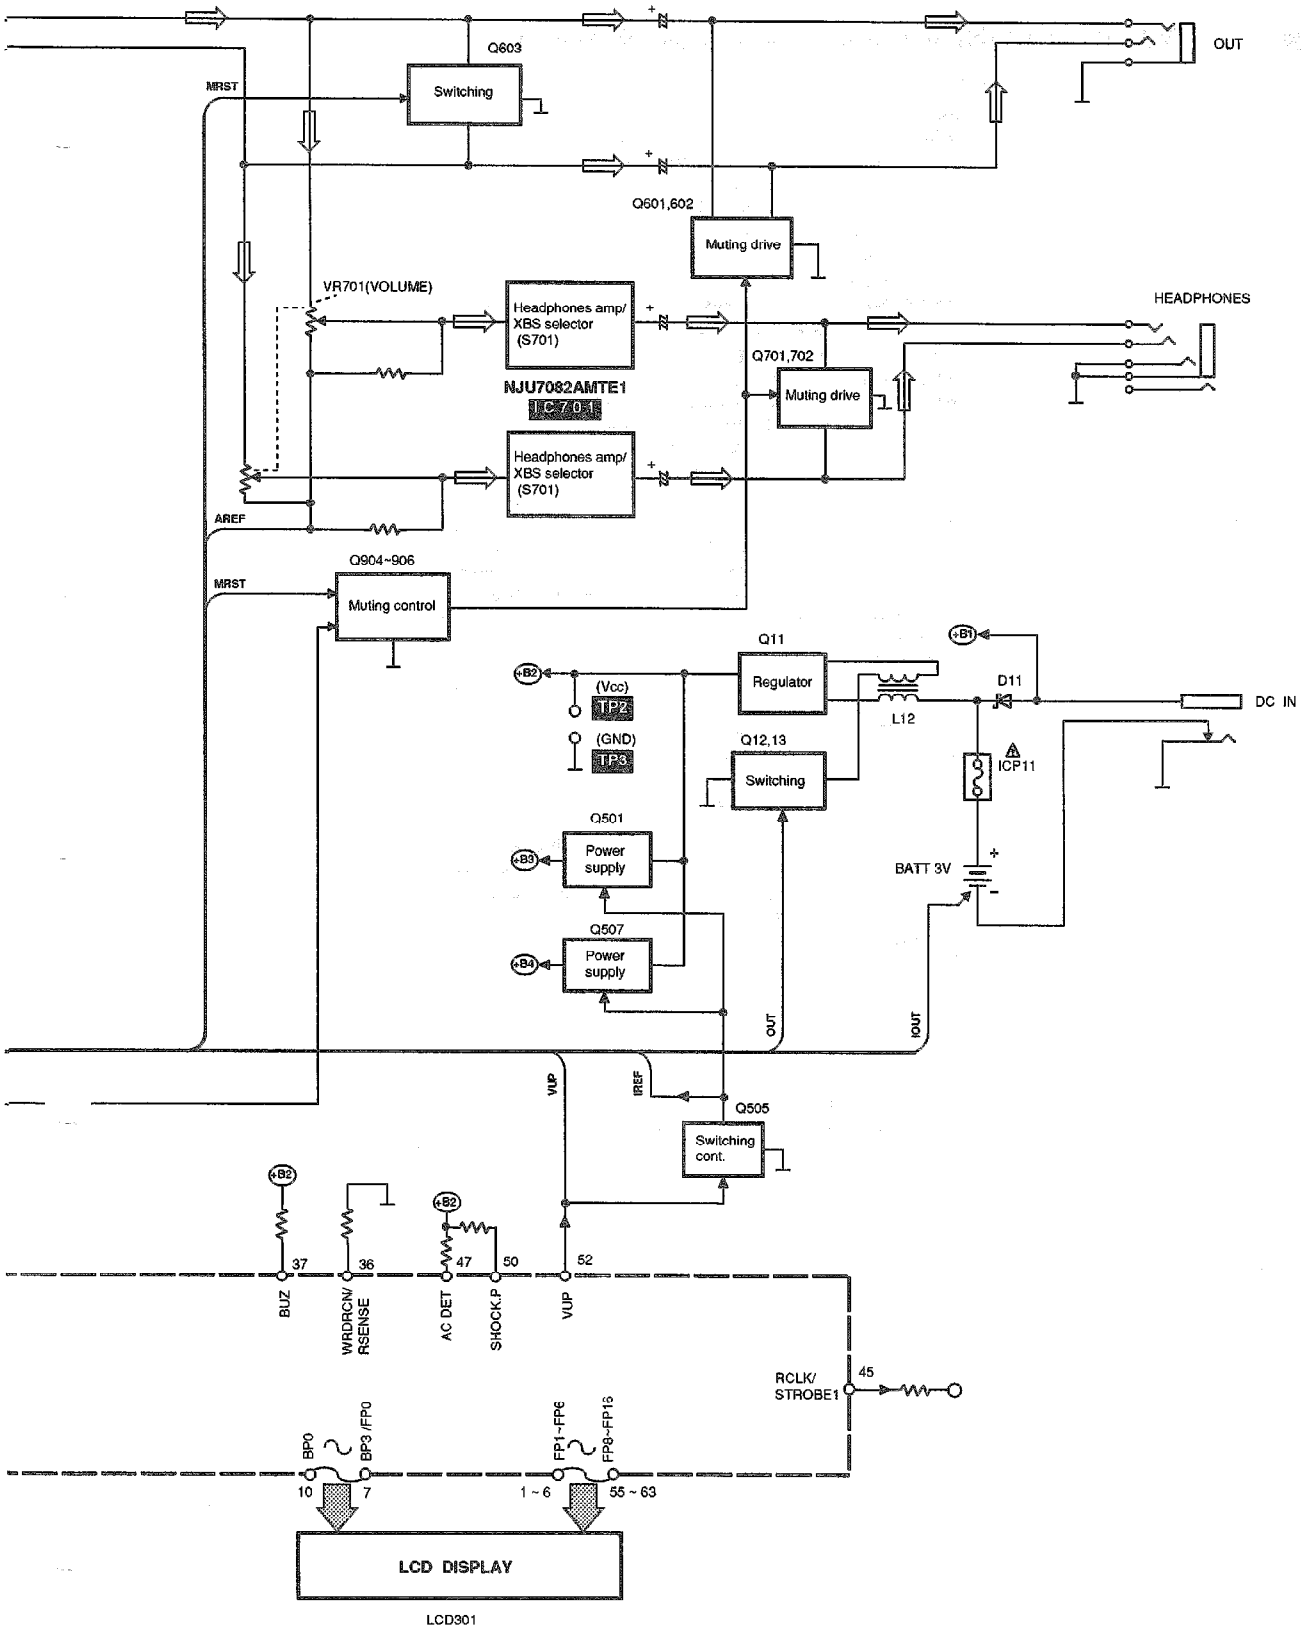
OUT
Q603
Switching
MRST
Q601,602
Muting drive
VR701(VOLUME)
Headphones amp/
XBS selector
(S701)
HEADPHONES
NJU7082AMTE1
IC701
Q701,702
Muting drive
Headphones amp/
XBS selector
(S701)
AREF
Q904~906
MRST
Muting control
Q11
Regulator
+B1
+B2
(Vcc)
TP2
(GND)
TP3
L12
D11
DC IN
Q12,13
Switching
ICP11
Q501
Power
supply
+B3
BATT 3V
Q507
Power
supply
+B4
OUT
IOUT
VUP
IREF
Q505
Switching
cont.
+B2
+B2
37
36
47
50
52
BUZ
WRDRCN/
RSENSE
AC DET
SHOCK.P
VUP
RCLK/
STROBE1
45
BP0
BP3 /FP0
FP1~FP6
FP8~FP16
10
7
1 ~ 6
55 ~ 63
LCD DISPLAY
LCD301

SCHEMATIC DIAGRAM (See parts list on pages 32, 34,35,36.)

(This schematic diagram may be modified at any time with the development of new technology.)

Notes:

- **S201**: Laser ON/OFF switch in "OFF" position.
  (It turns "ON" with disc holder closed.)
- **S202**: Rest detector in "OFF" position.
  (It turns "ON" when optical pickup comes to innermost periphery.)
- **S301**: Memory/recall (MEMORY/RECALL) switch.
- **S302**: Repeat (REPEAT) switch.
- **S303, 304**: Skip/search (|◀◀ -SKIP/--SEARCH ▶▶|) switches.
  (S303: ▶▶|, S304 : |◀◀)
- **S305**: Stop/power off (■ POWER OFF) switch.
- **S306**: Play/pause (▶ ▮▮) switch.
- **S307**: Play mode selector (MODE) in "RANDOM" position.
  (RANDOM←→NORMAL←→RESUME)
- **S308**: Hold (HOLD) switch in "ON" position.
- **S501**: Anti-shock switch in "ON" position.
- **S701**: XBS selector in "ON" position.
- The voltage value and waveforms are the reference voltage of this measured by DC electronic voltmeter (high impedance) and oscilloscope on the basis of GND terminal (DC IN Jack). Accordingly, there may arise some errors in the voltage values and waveforms depending upon the internal impedance of the tester or measuring unit.
  * The parenthesized is the voltage for test disc (1 kHz, L+R, 0 dB) in play mode, and the other, for no disc in stop mode.
  * AC adaptor is used for power supply.
- ▭ : Positive voltage lines.
- ⟹ : Audio signal lines.
- Important safety notice:
  Components identified by ⚠ mark have special characteristics important for safety. Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used. When replacing any of components, be sure to use only manufacture's specified parts shown in the parts list.
- ※ marks indicate printed resistor.

Caution!

IC and LSI are sensitive to static electricity.
Secondary trouble can be prevented by taking care during repair.

- Cover the parts boxes made of plastics with aluminum foil.
- Ground the soldering iron.
- Put a conductive mat on the work table.
- Do not touch the pins of IC or LSI with fingers directly.

● ⟹ : Audio signal lines.

(P.C.Board:on page 25)

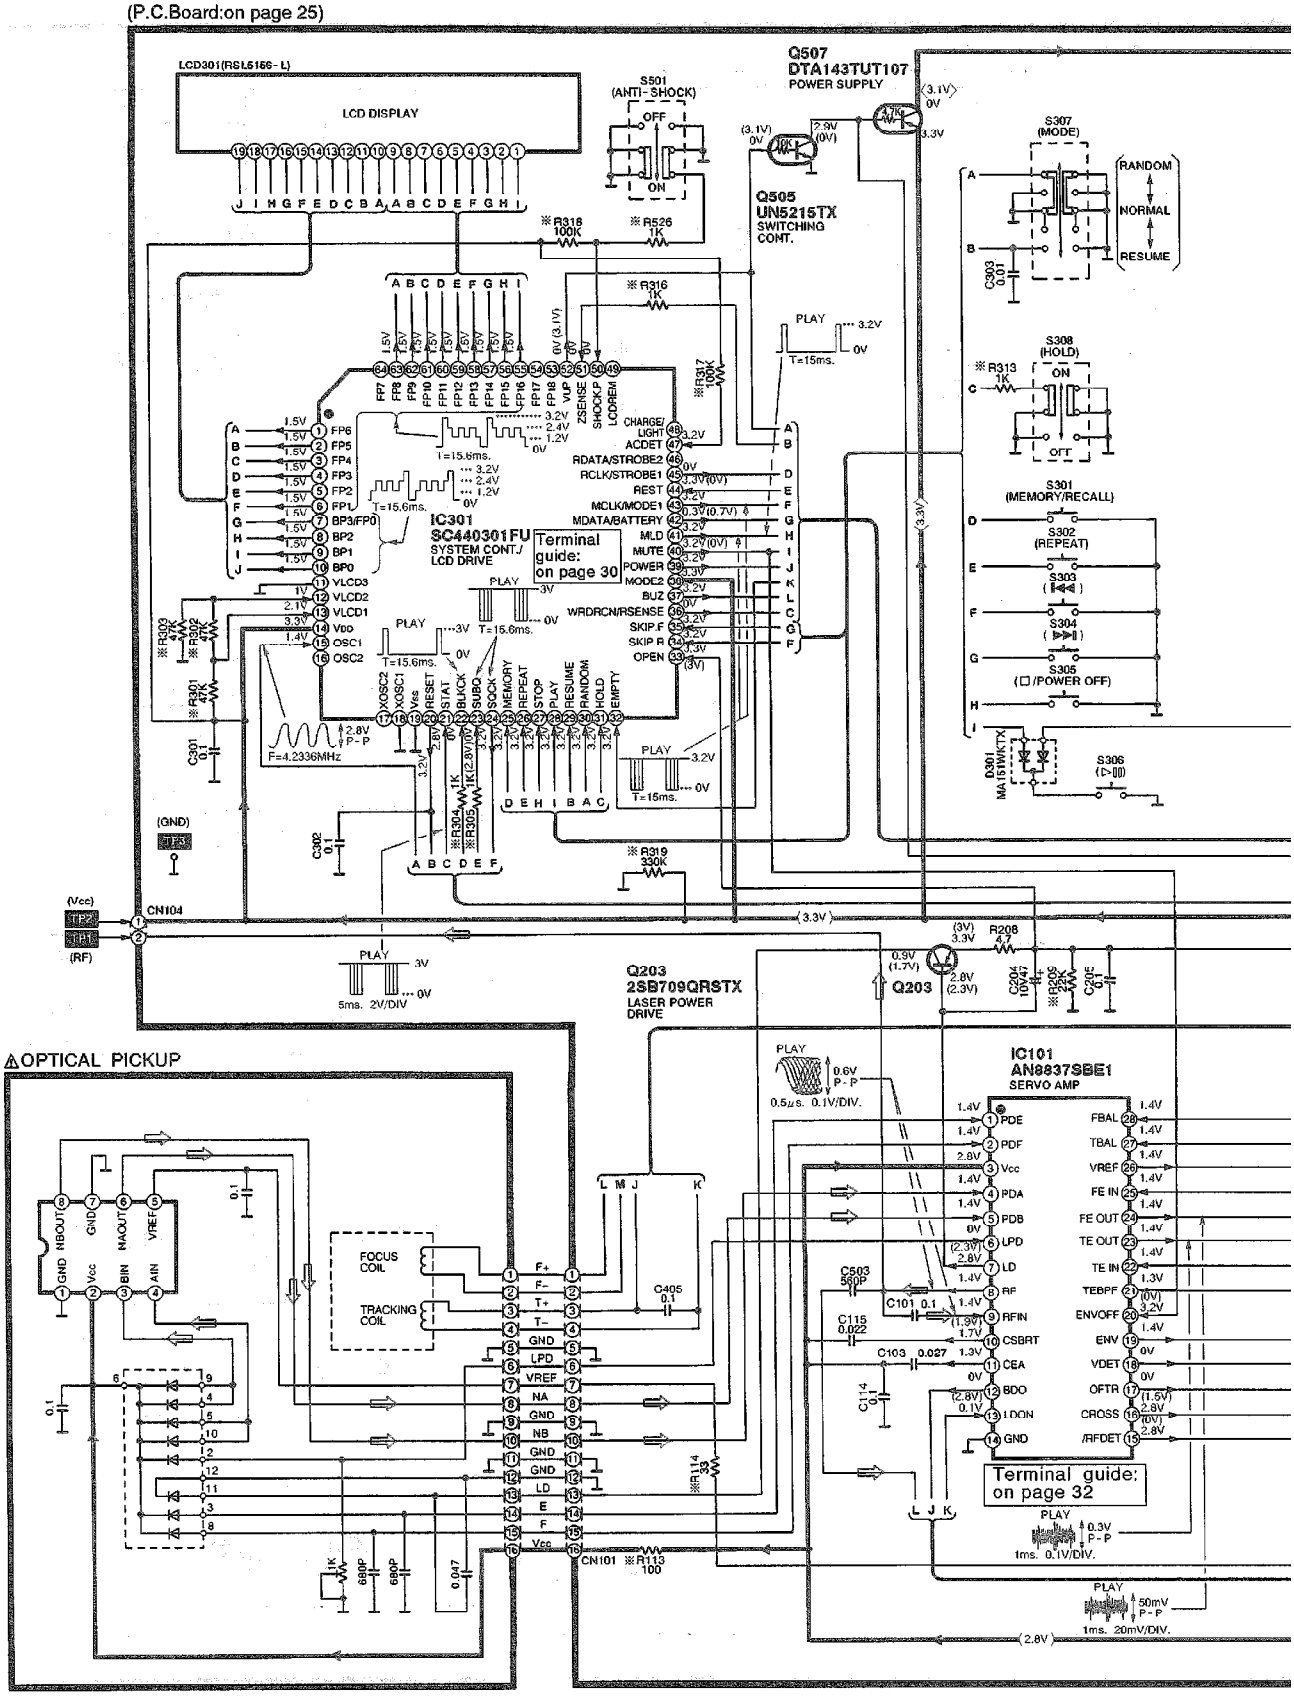

● ⟹ : Audio signal lines.

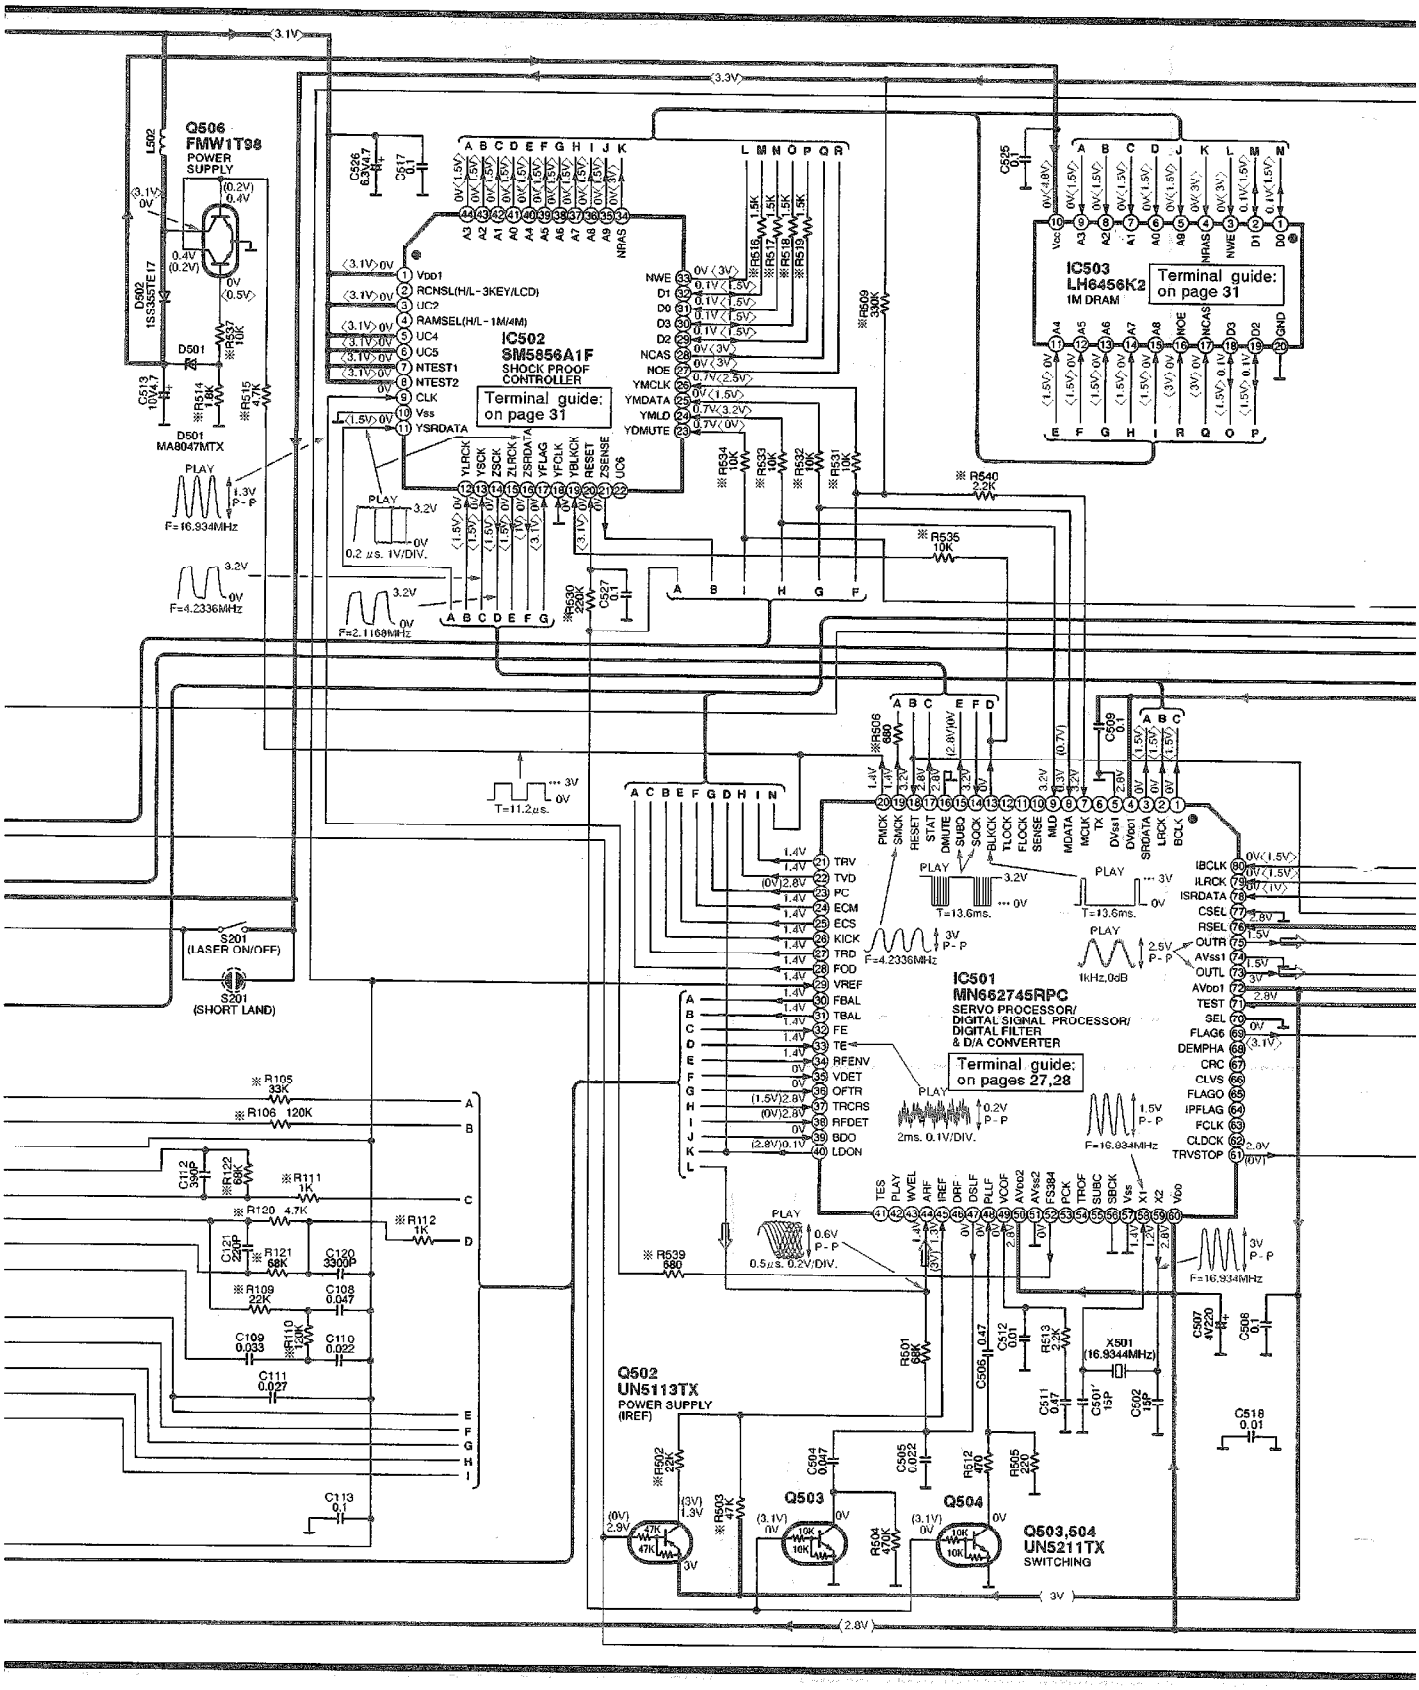

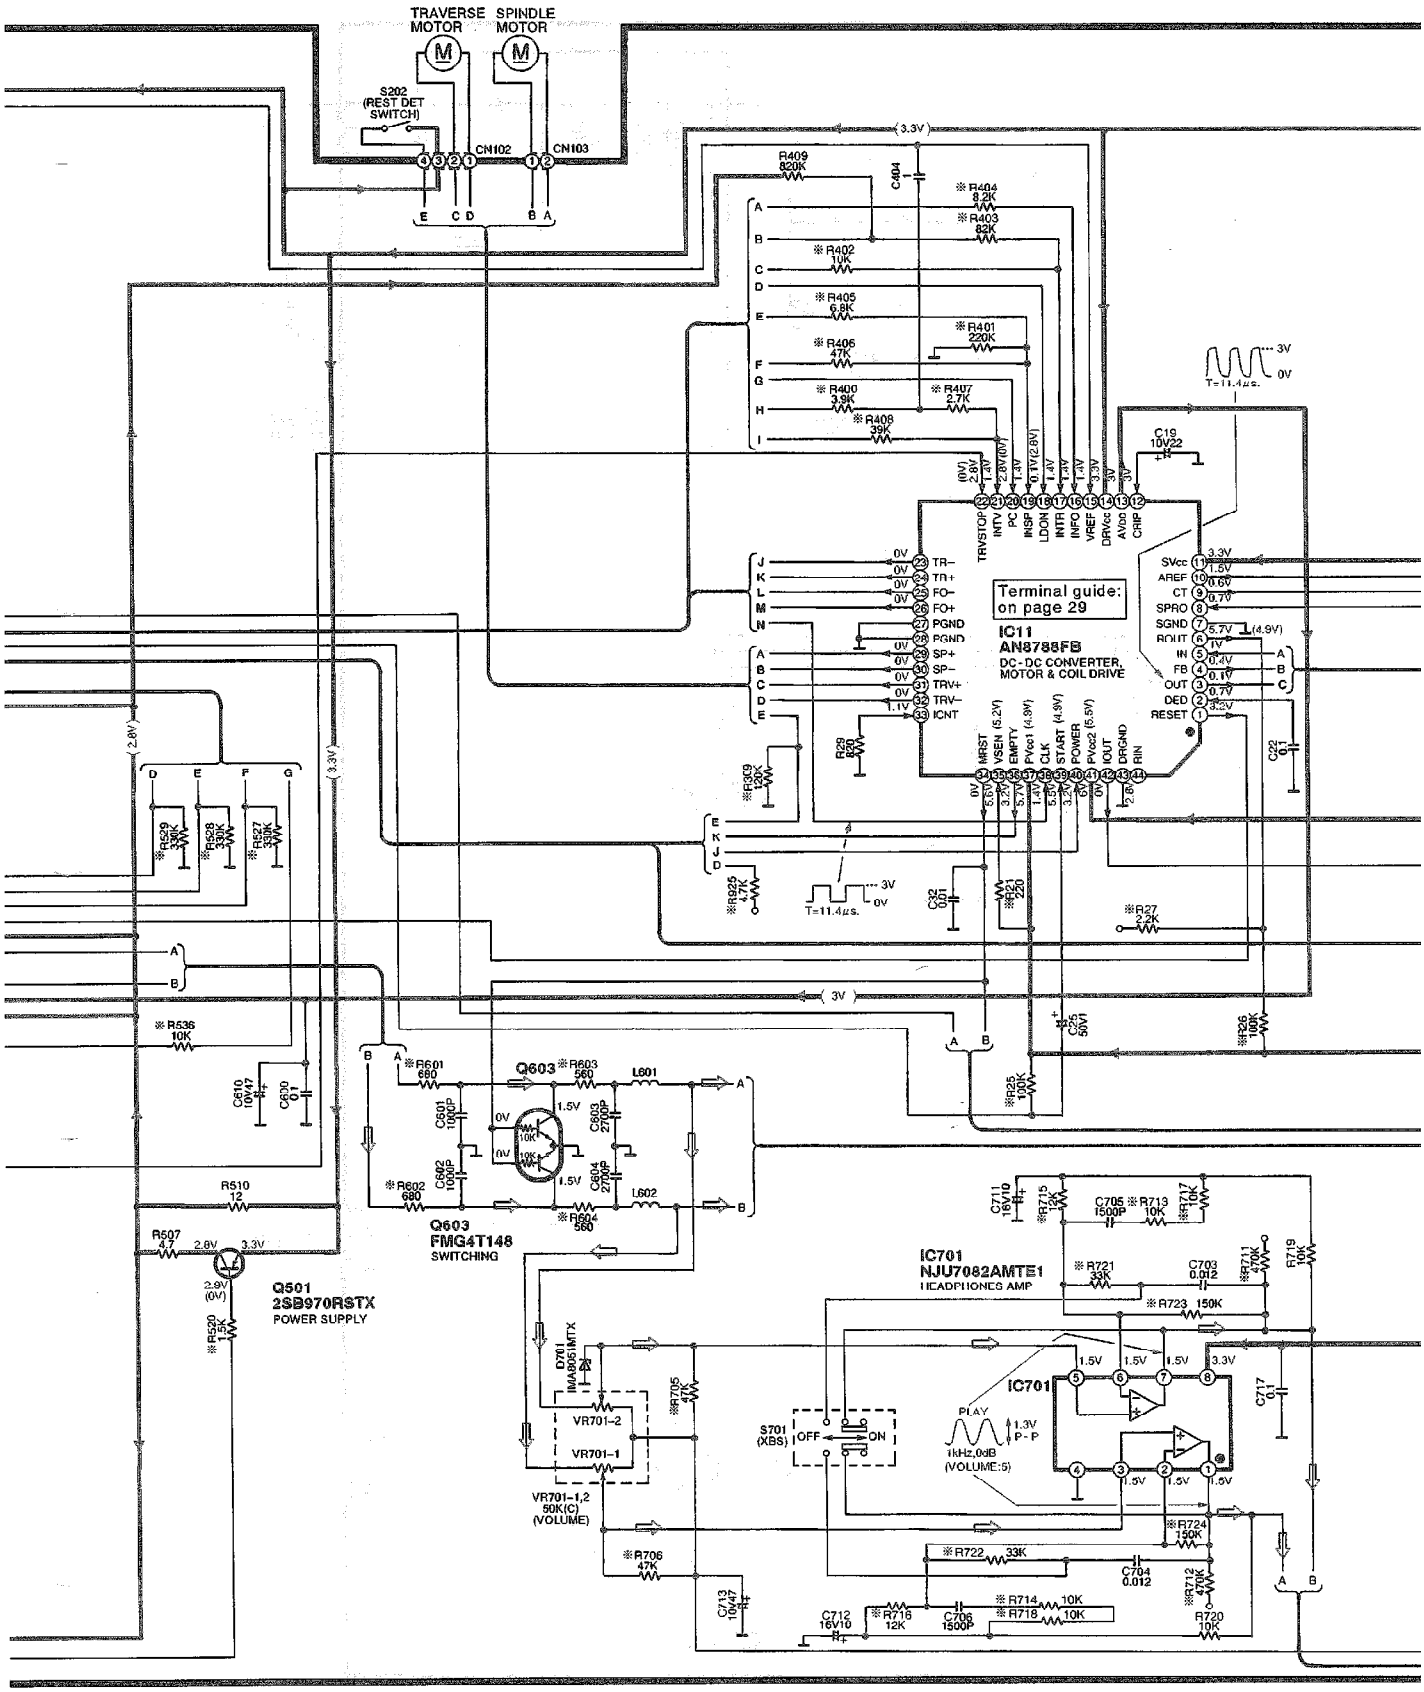
TRAVERSE MOTOR
SPINDLE MOTOR
S202 (REST DET SWITCH)
CN102
CN103
Terminal guide: on page 29
IC11
AN8788FB
DC-DC CONVERTER, MOTOR & COIL DRIVE
Q501
2SB970RSTX
POWER SUPPLY
Q603
FMG4T148
SWITCHING
IC701
NJU7082AMTE1
HEADPHONES AMP
S701 (XBS)
OFF
ON
VR701-2
VR701-1
VR701-1,2 50K(C) (VOLUME)
PLAY
1kHz,0dB (VOLUME:5)
1.3V P-P

● ⟹ : Audio signal lines.

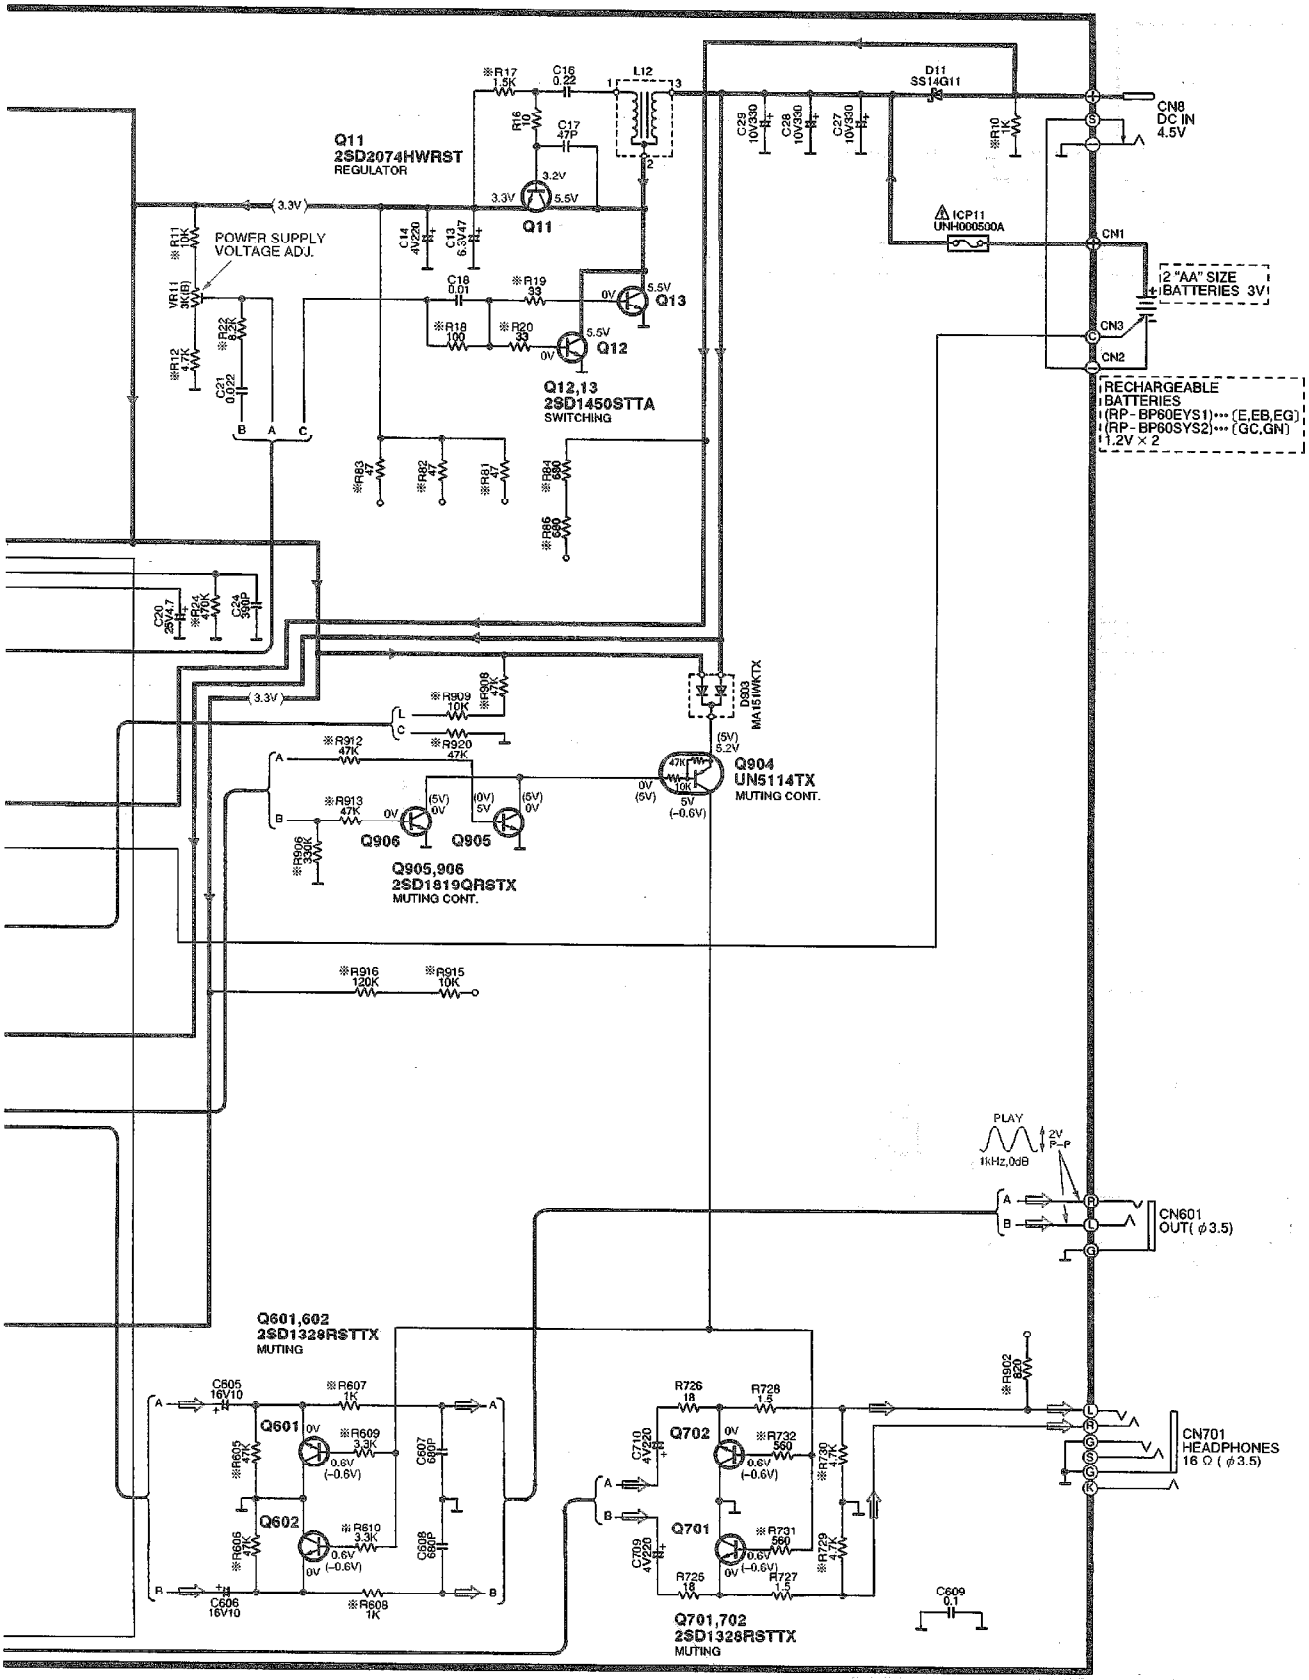

■PRINTED CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM

Notes:

- In this printed circuit board diagram, the parts and foil patterns on the board facing toward you are printed in black.
  The opposite side is printed in blue.
- The "●" mark denotes the connection points of double-faced foil patterns (through holes) on both sides of the printed circuit board.
- This printed circuit board diagram may be modified at any time with the development of new technology.

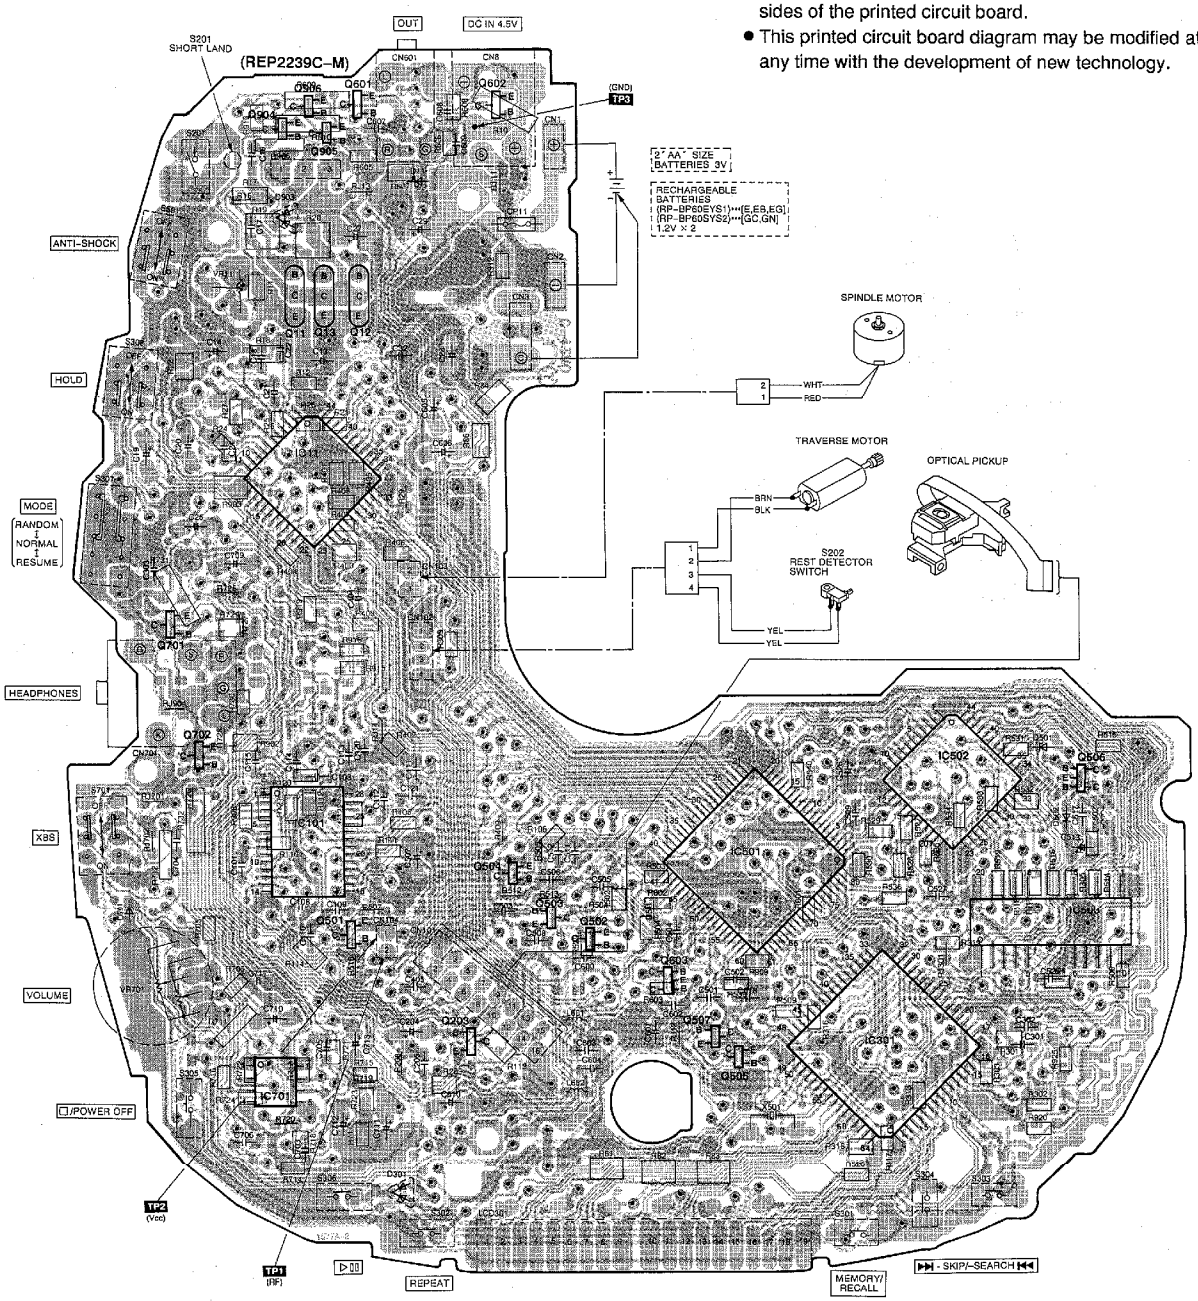

■REPAIRING THE PRINTED RESISTOR

This unit uses a printed resistor for the printed circuit board. If the printed resistor is insulated, all maintenance should be done with reference to the following repair parts connection diagram and repair parts list.

Note: Reading the repair parts connection diagram.

- The pattern foil and repair parts are printed in blue.
- The connection points (•⁄⁄⁄•) for the pattern foil and repair parts are printed in black.

REPLACEMENT PARTS LIST		
Ref. No.	**Part No.**	**Values & Remarks**
R10	ERDS2TJ102	1/4W, 1kΩ
R11	ERDS2TJ103	1/4W, 10kΩ
R12	ERDS2TJ472	1/4W, 4.7kΩ
R17	ERDS2TJ152	1/4W, 1.5kΩ
R18	ERDS2TJ101	1/4W, 100Ω
R19	ERDS2TJ330	1/4W, 33Ω
R20	ERDS2TJ330	1/4W, 33Ω
R21	ERDS2TJ221	1/4W, 220Ω
R22	ERDS2TJ822	1/4W, 8.2kΩ
R24	ERDS2TJ474	1/4W, 470kΩ
R25	ERDS2TJ104	1/4W, 100kΩ
R26	ERDS2TJ104	1/4W, 100kΩ
R27	ERDS2TJ222	1/4W, 2.2kΩ
R81	ERDS2TJ470	1/4W, 47Ω
R82	ERDS2TJ470	1/4W, 47Ω
R83	ERDS2TJ470	1/4W, 47Ω
R84	ERDS2TJ681	1/4W, 680Ω
R86	ERDS2TJ681	1/4W, 680Ω
R113	ERDS2TJ101	1/4W, 100Ω
R114	ERDS2TJ330	1/4W, 33Ω
R609	ERDS2TJ332	1/4W, 3.3kΩ
R610	ERDS2TJ332	1/4W, 3.3kΩ
R711	ERDS2TJ474	1/4W, 470kΩ
R712	ERDS2TJ474	1/4W, 470kΩ
R731	ERDS2TJ561	1/4W, 560Ω
R732	ERDS2TJ561	1/4W, 560Ω
R903	ERDS2TJ470	1/4W, 47Ω
R906	ERDS2TJ334	1/4W, 330kΩ
R908	ERDS2TJ473	1/4W, 47kΩ
R916	ERDS2TJ124	1/4W, 120kΩ

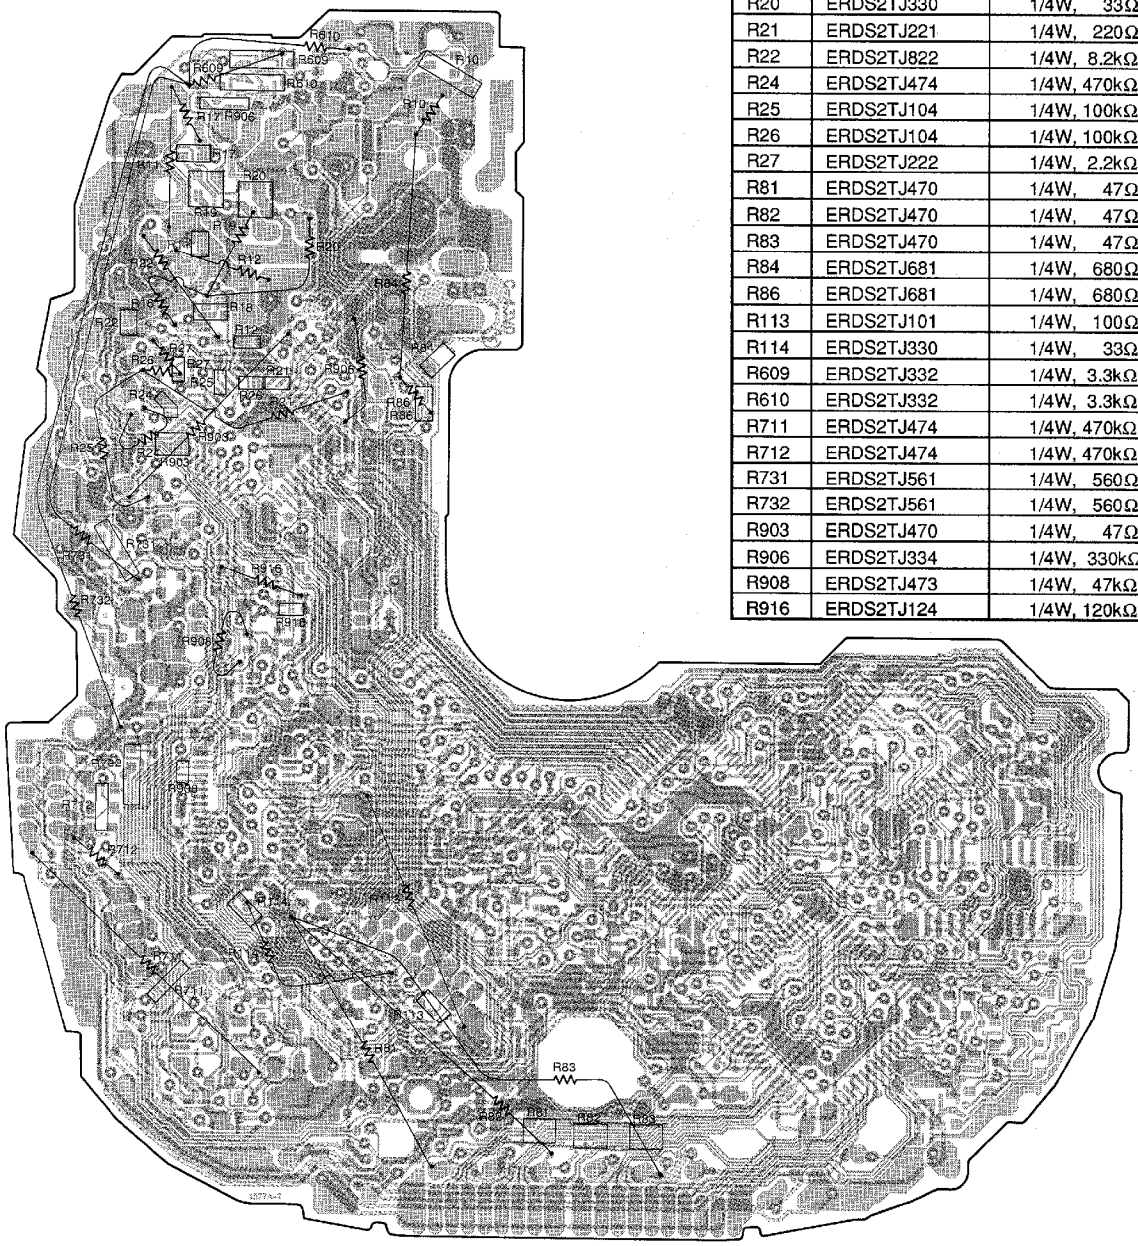

TERMINAL GUIDE

• IC501 (MN662745RPC): Servo processor/Digital signal processor/Digital filter/D/A converter

Pin No.	Mark	I/O Division	Function
1	BCLK	O	Serial bit clock output
2	LRCK	O	L/R discriminating signal output
3	SRDATA	O	Serial data signal output
4	DVDD1	I	Power supply (digital circuit) terminal
5	DVss1	—	GND (digital circuit) terminal
6	TX	—	Digital audio interface signal (Not used, open)
7	MCLK	I	Command clock signal
8	MDATA	I	Command data signal
9	MLD	I	Command load signal ("L" : LOAD)
10	SENSE	—	Sense signal (OFT, FESL, NACEND, NAJEND, POSAD, SFG) (Not used, open)
11	FLOCK	—	Optical servo condition (focus) ("L" : lead-in) (Not used, open)
12	TLOCK	—	Optical servo condition (tracking) ("L" : lead-in) (Not used, open)
13	BLKCK	O	Sub-code block clock (f=75 Hz)
14	SQCK	I	Sub-code Q register clock
15	SUBQ	O	Sub-code Q data
16	DMUTE	I	Muting input ("H" : MUTE) (Not used, connected to GND)
17	STAT	O	Status signal (CRC, CUE, CLVS, TTSTOP, FCLV, SQCK)
18	RESET	I	Reset signal ("L" : reset)
19	SMCK	O	System clock (f=4.2336 MHz)
20	PMCK	O	Frequency division clock signal ($f=\frac{1}{1.92}\times ck=88.2$ kHz)
21	TRV	O	Traverse servo control

Pin No.	Mark	I/O Division	Function
22	TVD	O	Traverse drive signal
23	PC	O	Turntable motor drive signal ("L" : ON)
24	ECM	O	Turntable motor drive signal (Forced mode)
25	ECS	O	Turntable motor drive signal (Servo error signal)
26	KICK	O	Kick pulse output
27	TRD	O	Tracking drive signal output
28	FOD	O	Focus drive signal output
29	VREF	I	D/A drive output (TVD, ECS, TRD, FOD, FBAL, TBAL) normal voltage input terminal
30	FBAL	O	Focus balance adj. output (Not used, open)
31	TBAL	O	Tracking balance adj. output
32	FE	I	Focus error signal (analog input)
33	TE	I	Tracking error signal (analog input)
34	RFENV	I	RF envelope signal
35	VDET	I	Oscillation det. signal ("H" : det.)
36	OFTR	I	Off track signal ("H" : Off track)
37	TRCRS	I	Track cross signal input
38	RFDET	I	RF detection signal ("L" : detection)
39	BDO	I	Dropout detection signal ("H" : dropout)
40	LDON	O	Laser power control ("H" : ON)
41	TES	—	Tracking error shunt output ("H" : dropout) (Not used, open)
42	PLAY	—	Play signal ("H" : play) (Not used, open)

Pin No.	Mark	I/O Division	Function
43	WVEL	—	Double velocity status signal ("H" : double) (Not used, open)
44	ARF	I	RF signal input
45	IREF	I	Reference current input
46	DRF	—	DSL bias terminal (Not used, connected to GND)
47	DSLF	O	DSL loop filter terminal
48	PLLF	I	PLL loop filter terminal
49	VCOF	I	VCO loop filter terminal (Not used, connected to $AV_{DD}2$)
50	$AV_{DD}2$	I	Power supply (analog circuit) terminal (2)
51	$AV_{SS}2$	—	GND (analog circuit) terminal
52	FS384	—	384 fs (16.9344 MHz) output (Not used, open)
53	PCK	—	PLL extract clock (f=4.3218 MHz) (Not used, open)
54	TROF	—	Tracking servo OFF signal (Not used, open)
55	SUBC	—	Sub-code serial output data (Not used, open)
56	SBCK	—	Sub-code serial input clock (Not used, connected to GND)
57	V_{SS}	—	GND terminal
58	X1	I	Crystal oscillator terminal (f=16.9344 MHz)
59	X2	O	
60	V_{DD}	I	Power supply terminal
61	TRVSTOP	O	Traverse motor stop control terminal
62	CLDCK	—	Sub-code frame clock signal (f CLDCK=7.35 kHz: Normal) (Not used, open)

Pin No.	Mark	I/O Division	Function
63	FCLK	—	Crystal frame clock (Not used, open)
64	IPFLAG	—	Interpolation flag terminal
65	FLAGO	—	Flag terminal
66	CLVS	—	Turntable servo phase synchro signal ("H" : CLV, "L" : Rough servo) (Not used, open)
67	CRC	—	Sub-code CRC check terminal ("H" : OK, "L" : NG) (Not used, open)
68	DEMPHA	—	De-emphasis ON signal ("H" : ON) (Not used, open)
69	FLAG6	—	Flag terminal
70	SEL	—	Not used, connected to GND
71	TEST	I	Test terminal (Normal: "H")
72	$AV_{DD}1$	I	Power supply (analog circuit) terminal (1)
73	OUTL	O	Lch audio signal
74	$AV_{SS}1$	—	GND (analog circuit) terminal (1)
75	OUTR	O	Rch audio signal
76	RSEL	I	Polarity direction control terminal of RF signal (Not used, connected to power supply)
77	CSEL	I	Frequency control terminal of crystal oscillator (Not used, connected to GND)
78	ISRDATA	I	Serial data signal input
79	ILRCK	I	L/R discriminating signal input
80	IBCLK	I	Serial bit clock input

• IC11 (AN8788FB): DC-DC converter & motor drive

Pin No.	Mark	I/O Division	Function
1	RESET	O	Reset signal input terminal
2	DED	I	Dead time input terminal
3	OUT	O	DC-DC converter output terminal
4	FB	O	Error amp output terminal
5	IN	I	Error amp input terminal
6	ROUT	O	Remote control interface output terminal
7	SGND	—	GND terminal
8	SPRO	I	Short protection input terminal
9	CT	I	Triangular wave oscillator terminal
10	AREF	O	1/2 AVDD output terminal
11	SV_{CC}	I	Power supply terminal
12	CRIP	I	Capacitor connection terminal for ripple filter
13	AV_{DD}	O	Ripple filter output terminal
14	DRV_{CC}	I	Power supply terminal
15	VREF	I	1/2 VCC input terminal
16	INFO	I	Focus coil drive input terminal
17	INTR	I	Tracking coil drive input terminal
18	LDON	I	Laser ON/ OFF drive control terminal
19	INSP	I	Spindle motor drive input terminal
20	PC	I	Spindle motor drive ON/OFF control terminal
21	INTV	I	Traverse motor drive control terminal
22	TRVSTOP	I	Traverse motor ON/ OFF control terminal

Pin No.	Mark	I/O Division	Function
23	TR−	O	Tracking coil drive output terminal
24	TR+		
25	FO−	O	Focus coil drive output terminal
26	FO+		
27 · 28	PGND	—	GND terminal
29	SP+	O	Spindle motor drive output terminal
30	SP−		
31	TRV+	O	Traverse motor drive output terminal
32	TRV−		
33	ICNT	I	Rechargeable current setting terminal
34	MRST	O	Muting reset output terminal
35	VSEN	I	Empty det. input terminal
36	EMPTY	O	Empty det. output terminal
37	$PV_{CC}1$	I	Power supply terminal
38	CLK	I	External synch. clock input terminal
39	START	I	Start oscillator input terminal
40	POWER	I	Power ON/ OFF input terminal
41	$PV_{CC}2$	I	Power supply terminal
42	I OUT	O	Rechargeable and battery det. terminal
43	DRGND	—	GND terminal
44	RIN	I	Remote control signal input terminal

• IC301 (SC440301FU): System control/LCD drive

Pin No.	Mark	I/O Division	Function
1 ~ 6	FP6 ~ FP1	O	LCD segment signal output terminal
7	BP3/FP0	O	LCD segment signal output terminal
8 ~ 10	BP2 ~ BP0	O	LCD segment signal output terminal
11 ~ 13	VLCD3 ~ VLCD1	I	Voltage control input terminal
14	V_{DD}	I	Power supply terminal
15	OSC1	I	Main system clock input terminal
16	OSC2	—	Not used, open
17	XOSC2	—	Not used, open
18	XOSC1	—	Not used, connected to GND
19	V_{SS}	—	GND terminal
20	RESET	O	Reset signal output terminal
21	STAT	I	Status signal Input (CRC, CUE, CLVS, TT STOP, FCLV, SQOK)
22	BLKCK	I	Sub-code block clock (F=75Hz with normal play)
23	SUBQ	I	Sub-code Q data input terminal
24	SQCK	O	Sub-code Q register clock signal output terminal
25	MEMORY	I	Key switch input terminal (MEMORY)
26	REPEAT	I	Key switch input terminal (REPEAT)
27	STOP	I	Key switch input terminal (STOP)
28	PLAY	I	Key switch input terminal (PLAY/PAUSE)
29	RESUME	I	Key switch input terminal (RESUME)
30	RANDOM	I	Key switch input terminal (RANDOM)
31	HOLD	I	Key switch input terminal (HOLD)
32	EMPTY	I	Empty det. input terminal
33	OPEN	I	Disc holder open det. terminal ("L" with open)
34	SKIP. R	I	Key switch input terminal (SKIP/SEARCH. R)
35	SKIP. F	I	Key switch input terminal (SKIP/SEARCH. F)
36	WRDRCN/ RSENSE	I/O	Remote control signal terminal
37	BUZ	O	Beep control signal output terminal
38	MODE2	—	Not used, connected to GND
39	POWER	O	Power ON/OFF signal output terminal
40	MUTE	O	Muting signal output terminal ("H" : mute)
41	MLD	O	Command load signal output terminal ("L" : load)
42	MDATA/ BATTERY	O	Command data signal output terminal
43	MCLK/ MODE1	O	Command clock signal output terminal
44	REST	I	Rest det. input terminal
45	RCLK/ STROBE1	O	Remote control clock signal output terminal
46	RDATA/ STROBE2	I/O	Remote control data signal terminal
47	ACDET	I	Power det. input terminal
48	CHARGE/ LIGHT	—	Not used, open
49	LCDREM	—	Not used, open
50	SHOCK. P	I	Key switch input terminal (not used connected to power supply)
51	ZSENSE	I	Sense signal input terminal
52	VUP	O	Reference current control output terminal
53 ~ 54	FP18 ~ FP17	—	Not used, open
55 ~ 63	FP16 ~ FP8	O	LCD segment signal output terminal
64	FP7	—	Not used, open

● IC502 (SM5856A1F) : Shock proof controller

Pin No.	Mark	I/O Division	Function
1	$V_{DD}1$	I	Power supply terminal
2	UC1	I	Key input terminal (ANTI-SHOCK MEMORY)
3	XBS	—	Key input terminal (Not used, open)
4	BASS	—	Not used, open
5	ASC	—	Sound quality/sound field control terminal (Not used, open)
6	UC5	O	Sound quality/sound field control terminal
7	NTEST1	—	Test terminal (Not used, open)
8	NTEST2		
9	CLK	I	Clock signal input (f=16.9344MHz)
10	V_{SS}	—	GND terminal
11	YSRDATA	I	Serial data input terminal
12	YLRCK	I	L/R clock input terminal
13	YSCK	I	Serial bit clock input terminal
14	ZSCK	O	Serial bit clock output terminal
15	ZLRCK	O	L/R clock output terminal
16	ZSRDATA	O	Serial data output terminal
17	YFLAG	I	RAM over-flow flag terminal
18	YFCLK	I	Crystal frame clock input
19	YBLKCK	I	Sub-cord block clock input terminal
20	RESET	I	Reset input terminal
21	ZSENSE	O	Microcomputer states output terminal
22	RAMSEL	I	Not used, open
23	YDMUTE	I	Mute input terminal
24	YMLD	I	Microcomputer latch clock input terminal
25	YMDATA	I	Microcomputer serial data input terminal
26	YMCLK	I	Microcomputer shift clock input terminal
27	NOE	O	D-RAM output enable terminal
28	NCAS	O	D-RAM column address strobe terminal
29 ∫ 32	D0 ∫ D3	I/O	D-RAM data input/output terminal
33	NWE	O	D-RAM write enable terminal
34	NRAS	O	D-RAM low address strobe terminal
35 ∫ 44	A0 ∫ A9	O	D-RAM address output terminal

● IC503 (LH6456K2) : 1M DRAM

Pin No.	Mark	I/O Division	Function
1	D0	I/O	Data input/output terminal
2	D1	I/O	Data input/output terminal
3	NWE	I	Write enable terminal
4	NRAS	I	Low address strobe terminal
5	A9	I	Address input terminal
6	A0	I	Address input terminal
7 ∫ 9	A1 ∫ A3	I	Address input terminal
10	VCC	I	Power supply terminal
11 ∫ 15	A4 ∫ A8	I	Address input terminal
16	NOE	I	Output enable terminal
17	NCAS	I	Column address strobe terminal
18	D3	I	Data input terminal
19	D2	I	Data input terminal
20	GND	—	GND terminal

• IC101 (AN8637SBE1): Servo amp.

Pin No.	Mark	I/O Division	Function
1	PDE	I	Tracking signal input terminal (1)
2	PDF	I	Tracking signal input terminal (2)
3	Vcc	I	Power supply terminal
4	PDA	I	Focus signal input terminal (1)
5	PDB	I	Focus signal input terminal (2)
6	LPD	I	APC amp input terminal
7	LD	O	APC amp output terminal
8	RF	O	RF summing output terminal
9	RF IN	I	RF signal input terminal
10	CSBRT	O	Capacitor connection terminal for OFTR
11	CEA	O	Capacitor connection terminal for H.P.F. amp
12	BDO	O	Dropout signal output terminal ("H" : Dropout)
13	LDON	I	APC control input terminal
14	GND	—	GND terminal
15	/RFDET	O	RF det. signal output terminal ("L" : Det.)
16	CROSS	O	Track cross signal output terminal
17	OFTR	O	Off track signal output terminal ("H" : Off track)
18	VDET	O	Vibration det. signal output terminal ("H" : Det.)
19	ENV	O	RF envelope signal output terminal
20	ENV OFF	I	ENV control input terminal
21	TEBPF	I	VDET input terminal
22	TE IN	I	Tracking error amp input terminal
23	TE OUT	O	Tracking error amp output terminal
24	FE OUT	O	Focus error amp output terminal
25	FE IN	I	Focus error amp input terminal
26	VREF	O	Reference voltage output terminal
27	TBAL	I	Tracking balance signal input terminal
28	FBAL	I	Focus balance signal input terminal

REPLACEMENT PARTS LIST

Notes: * Important safety notice:
Components identified by ⚠ mark have special characteristics important for safety.
Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.
When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.
* Warning: This product uses a laser diode. Refer to caution statements on page 2.
* ACHTUNG: Die lasereinheit nicht zerlegen.
Die lasereinheit darf nur gegen eine vom hersteller spezifizierte einheit ausgetauscht werden.

Ref. No.	Part No.	Part Name & Description	Remarks
		CABINET AND CHASSIS	
1	RKK0065-KJ	BATTERY COVER	
2	RJF0026	LCD HOLDER	
3	RGV0145-K	XBS/MODE/HOLD KNOB	
4	RJC93020	COMMON BATTERY TERMINAL	
5	RFKJLXP240EK	BOTTOM CABINET ASS'Y	(E, EG)
5	RFKJLXP240EB	BOTTOM CABINET ASS'Y	(EB)
5	RFKJLXP240GC	BOTTOM CABINET ASS'Y	(GC, GN)
5-1	RKA0063-K	FOOT	
6	RMA0677	REAR ORNAMENT	
7	RYF04U2F-K	CD COVER ASS'Y	
8	RGP0538-Q	LCD PANEL	
9	RGU1368-H	OPERATION BUTTON(A)	
10	RGU1369-H	OPERATION BUTTON(B)	
11	RHE5119YA	SCREW	
12	RFKKLS240P-K	INTERMEDIATE CABINET ASS'Y	
13	RME0210	OPEN SPRING	
14	XTN17+6GFZ	SCREW	
15	RAE0141Z	TRAVERSE DECK	⚠
15-1	SHGD157	FLOATING RUBBER(1)	
15-2	SHGD165	FLOATING RUBBER(2)	
16	RGV0145-H	ANTI-SHOCK KNOB	

CABINET PARTS LOCATION

Note: When changing loading mechanism parts, apply the specified grease to the areas marked "XX" as shown in the drawing.

Ref. No.	Part No.
Ⓐ	RFKXPG671

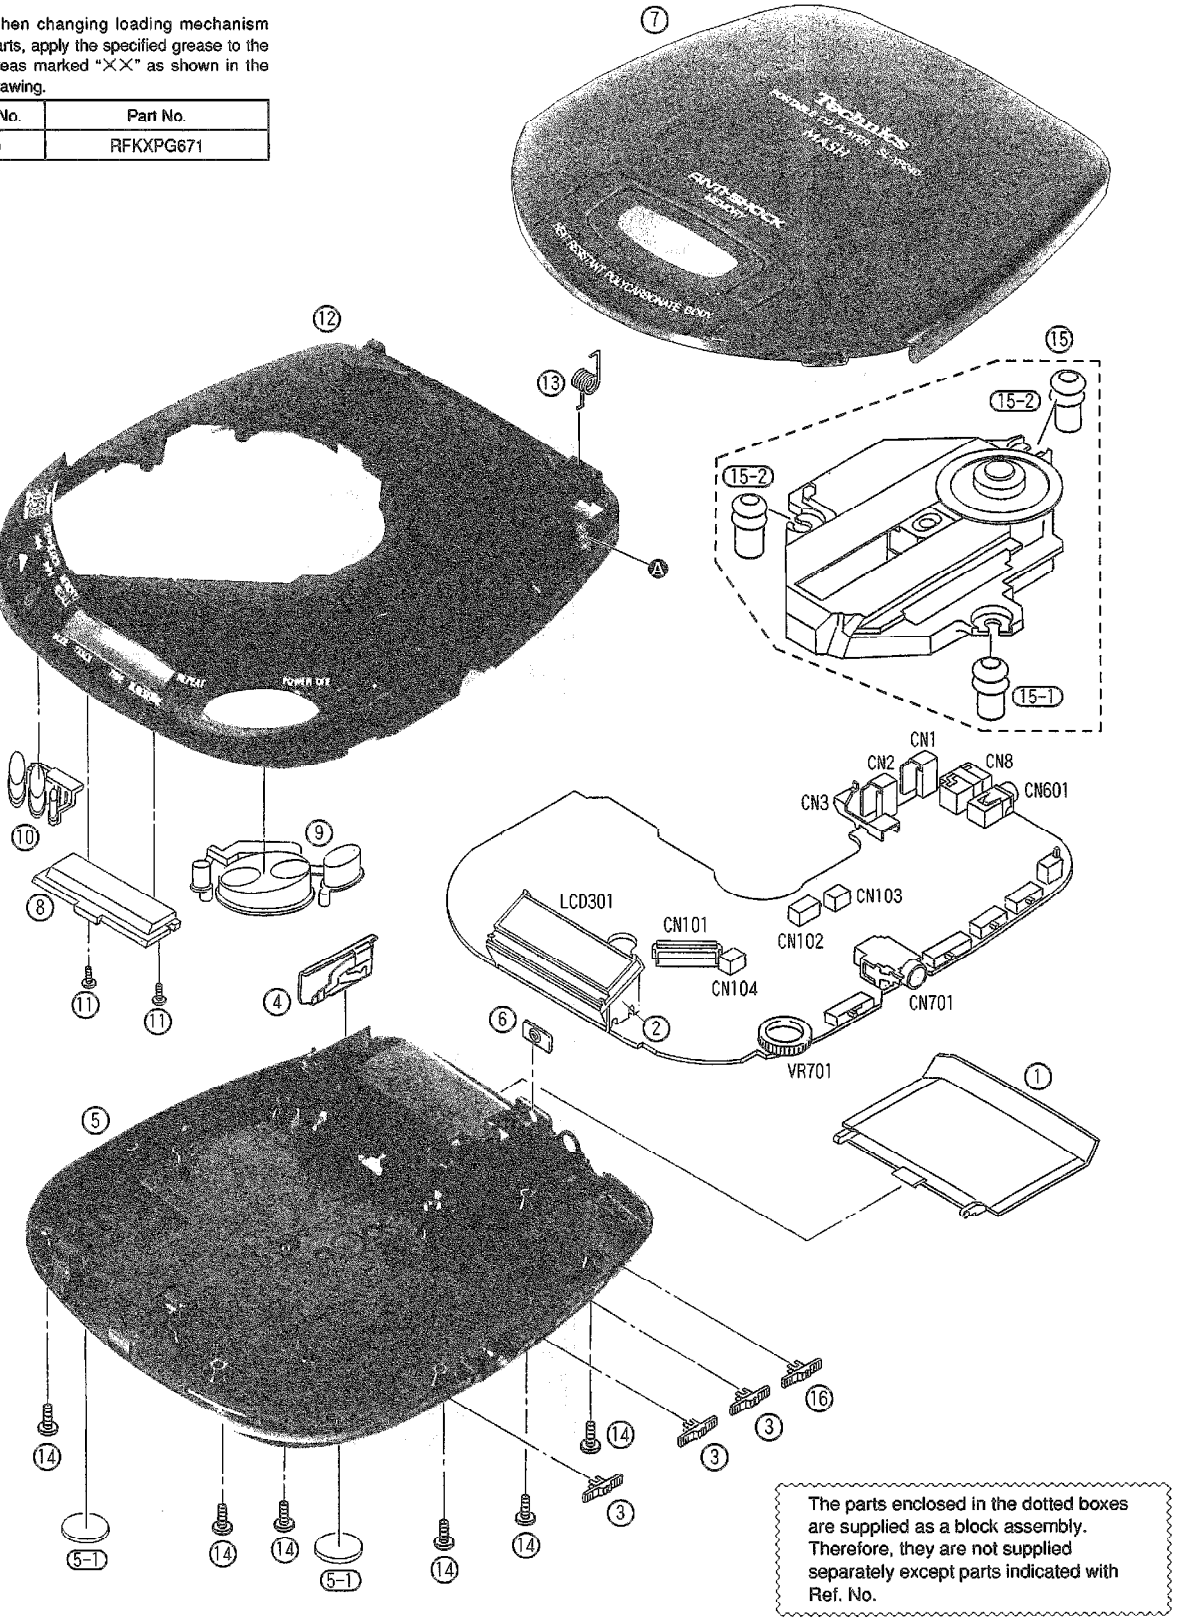

The parts enclosed in the dotted boxes are supplied as a block assembly. Therefore, they are not supplied separately except parts indicated with Ref. No.

REPLACEMENT PARTS LIST

Notes: * Important safety notice:
Components identified by ⚠ mark have special characteristics important for safety.
Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.
When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.
* The parenthesized indications in the Remarks columns specify the areas. (Refer to the cover page for area.)
Parts without these indications can be used for all areas.
* Warning: This product uses a laser diode. Refer to caution statements on page 2.
* ACHTUNG: Die lasereinheit nicht zerlegen.
Die lasereinheit darf nur gegen eine vom hersteller spezifizierte einheit ausgetauscht werden.

Ref. No.	Part No.	Part Name & Description	Remarks
		INTEGRATED CIRCUIT(S)	
IC11	AN8788FB	DC-DC CONV. /MOTOR DRIVE	
IC101	AN8837SBE1	SERVO AMP	
IC301	SC440301FU	SYSTEM CONT. / LCD DRIVE	
IC501	MN662745RPC	SERVO PROCESSOR	
IC502	SM5856A1F	SHOCK PROOF CONTROLLER	
IC503	LH6456K2	1M DRAM	
IC701	NJU7082AMTE1	HEADPHONES AMP	
		TRANSISTOR(S)	
Q11	2SD2074HWRST	TRANSISTOR	
Q12, 13	2SD1450STTA	TRANSISTOR	
Q203	2SB709QRSTX	TRANSISTOR	
Q501	2SB970RSTX	TRANSISTOR	
Q502	UN5113TX	TRANSISTOR	
Q503, 504	UN5211TX	TRANSISTOR	
Q505	UN5215TX	TRANSISTOR	
Q506	FMW1T98	TRANSISTOR	
Q507	DTA143TUT107	TRANSISTOR	
Q601, 602	2SD1328QRSTX	TRANSISTOR	
Q603	FMG4T148	TRANSISTOR	
Q701, 702	2SD1328QRSTX	TRANSISTOR	
Q904	UN5114TX	TRANSISTOR	
Q905, 906	2SD1819QRSTX	TRANSISTOR	
		DIODE(S)	
D11	SS14G11	DIODE	
D301	MA151WKTX	DIODE	
D501	MA8047MTX	DIODE	
D502	1SS355TE17	DIODE	
D701	MA8051MTX	DIODE	
D903	MA151WKTX	DIODE	
		IC PROTECTOR(S)	
ICP11	UNH000500A	IC PROTECTOR	⚠
		VARIABLE RESISTOR(S)	
VR11	EVNDXAA00B33	POWER SUPPLY VOLTAGE ADJ.	
VR701	EVUT2FA26C54	VOLUME	

Ref. No.	Part No.	Part Name & Description	Remarks
		COIL(S)	
L12	RLZ0028T-0	COIL	
L502	RLQU331KT-W	COIL	
L601, 602	RLB0003	COIL	
		OSCILLATOR(S)	
X501	RSXZ16M9M01T	OSCILLATOR(16.9344MHz)	
		LCD(S)	
LCD301	RSL5156-L	LCD	
		SWITCH(ES)	
S201	ESE11SV1	LASER ON/OFF	
S202	SSHD1-2	REST DETECTOR	
S301	EVQ21405R	MEMORY/RECALL	
S302	EVQ21405R	REPEAT	
S303	EVQ21405R	SKIP/SEARCH(R)	
S304	EVQ21405R	SKIP/SEARCH(F)	
S305	EVQ21405R	STOP/POWER OFF	
S306	EVQ21405R	PLAY/PAUSE	
S307	ESD11H230	PLAY MODE SELECTOR	
S308	ESD11H220	HOLD	
S501	ESD11H220	ANTI-SHOCK	
S701	ESD11H220	XBS SELECTOR	
		CONNECTOR(S) AND JACK(S)	
CN1	RJC93015-1	BATTERY TERMINAL(+)	
CN2	RJC93015-1	BATTERY TERMINAL(-)	
CN3	RJH5102-1	RECHARGEABLE BATT. TERMINAL	
CN8	RJJ43K09-C	DC IN JACK	
CN101	RJU035T016-1	SOCKET(16P)	
CN102	RJT068W04V	CONNECTOR(4P)	
CN103, 104	RJT068W02V	CONNECTOR(2P)	
CN601	RJJD3S5ZB-C	OUT JACK	
CN701	RJJ34TH02-C	HEADPHONES JACK	
		PACKING MATERIAL	
P1	RPK0752	PACKING CASE	

Ref. No.	Part No.	Part Name & Description	Remarks
P2	RPQ0660	SPACER	
P3	RPF0111	PROTECTION BAG (UNIT)	
P4	RPF0046	PROTECTION BAG (F. B.)	
		ACCESSORIES	
A1	RFKSLXP240EK	INSTRUCTION MANUAL ASS'Y	(E)
A1	RQT3400-B	INSTRUCTION MANUAL	(EB, GN)
A1	RFKSLXP240EG	INSTRUCTION MANUAL ASS'Y	(EG)
A1	RFKSLXP240GC	INSTRUCTION MANUAL ASS'Y	(GC)
A2	RFEA401E-2S	AC ADAPTOR	(E, EG)⚠
A2	RFEA404B-1W	AC ADAPTOR	(EB)⚠
A2	RFEA403Z-S	AC ADAPTOR	(GC)⚠
A2	RFEA403A-S	AC ADAPTOR	(GN)⚠
A3	RQA0117	WARRANTY CARD	(E, EB, EG)
A3	RQX7433ZA	WARRANTY CARD	(GN)
A4	RQCB0169	SERVICENTER LIST	
A5	RFEV317A-KS	STEREO EARPHONES	
A6*	RKB2052A-0	EAR PADS	

Ref. No.	Part No.	Part Name & Description	Remarks
A7	SJP5213-2	POWER PLUG ADAPTOR	(GC)⚠
A8	RP-BP60EYS1	RECHARGEABLE BATTERIES	(E, EB, EG)
A8	RP-BP60SYS2	RECHARGEABLE BATTERIES	(GC, GN)
A8-1	RFKNLS370-K	BATTERY CARRING CASE	
		<PRINTED CIRCUIT BOARDS	
		ASS'Y>	
PCB1	REP2239C-M	MAIN P. C. B. ASS'Y	(RTL)
		<GREASE OR JIG/TOOL>	
		TEST DISC	
SA1	SZZP1054C	PLAYABILITY TEST DISC	
SA2	SZZP1056C	UNEVEN TEST DISC	
		GREASE	
SA3	RFKXPG671	MOLYCOAT GREASE PG671	

*This item is not attached to merchandise, but it is supplied as a replacement part.

- The marking (RTL) indicates that the Retention Time is limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

PACKAGING

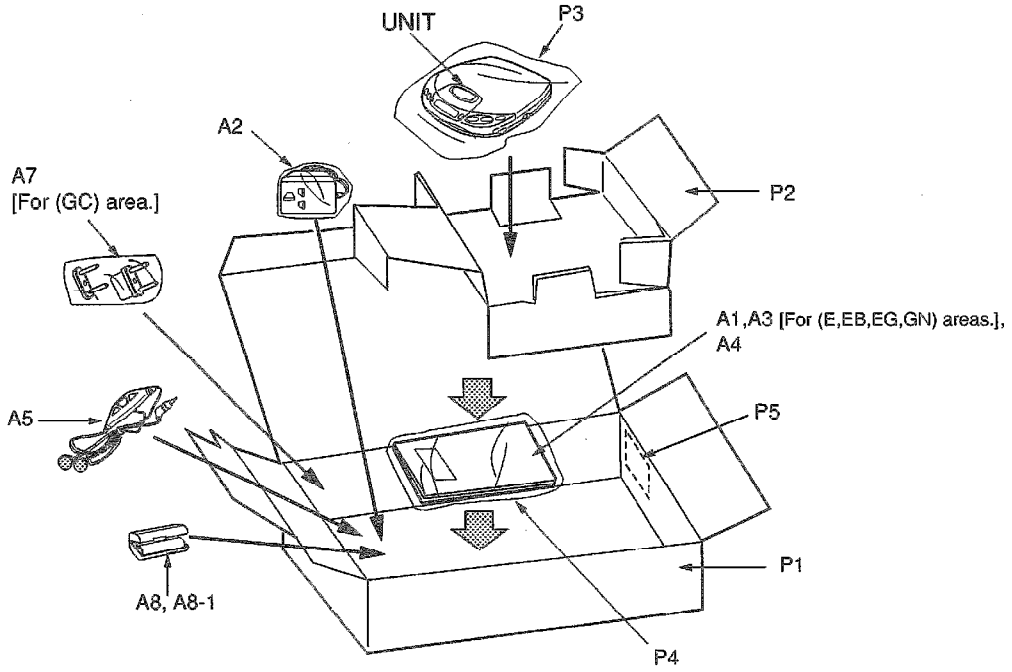

RESISTORS AND CAPACITORS

Notes: * Capacity values are in microfarads (uF) unless specified otherwise, P=Pico-farads (pF) F=Farads (F)
* Resistance values are in ohms, unless specified otherwise, 1K=1,000 (OHM), 1M=1,000k (OHM)

Ref. No.	Part No.	Values & Remarks
		RESISTORS
R16	ERJ6GEYJ100	1/10W 10
R29	ERJ6GEYJ821V	1/10W 820
R208	ERJ6GEYJ4R7V	1/10W 4.7
R409	ERJ6GEYJ824V	1/10W 820K
R501	ERJ6GEYJ683V	1/10W 68K
R504	ERJ6GEYJ474V	1/10W 470K
R505	ERJ6GEYJ221V	1/10W 220
R507	ERJ6GEYJ4R7V	1/10W 4.7
R510	ERJ6GEYJ120V	1/10W 12
R512	ERJ6GEYJ471V	1/10W 470
R513	ERJ6GEYJ222V	1/10W 2.2K
R719, 720	ERJ6GEYJ103V	1/10W 10K
R725, 726	ERJ6GEYJ180V	1/10W 18
R727, 728	ERJ6GEYK1R5V	1/10W 1.5
		CHIP JUMPERS
RJ11-14	ERJ6GEY0R00V	CHIP JUMPER
RJ301	ERJ6GEY0R00V	CHIP JUMPER
RJ701, 702	ERJ6GEY0R00V	CHIP JUMPER
RJ904	ERJ6GEY0R00V	CHIP JUMPER
		CAPACITORS
C13	RCE0JSL470IX	6.3V 47U
C14	ECEA0GKA221	4V 220U
C16	ECUVNC224KBN	16V 0.22U
C17	ECUV1H470KCN	50V 47P
C18	ECUV1E103KBN	25V 0.01U
C19	ECEA1AKA220I	10V 22U
C20	ECEA1EKA4R7I	25V 4.7U
C21	ECUV1E223KBN	25V 0.022U
C22	ECUVNE104KBN	25V 0.1U
C24	ECUV1H391KBN	50V 390P
C25	ECEA1HKA010I	50V 1U
C27-29	RCE1AMT331IV	10V 330U
C32	ECUV1E103KBN	25V 0.01U
C101	ECUVNE104KBN	25V 0.1U
C103	ECUV1E273KBN	25V 0.027U
C108	ECUV1C473KBN	16V 0.047U
C109	ECUV1C333KBN	16V 0.033U
C110	ECUV1E223KBN	25V 0.022U
C111	ECUV1E273KBN	25V 0.027U
C112	ECUV1H391KBN	50V 390P
C113, 114	ECUVNE104ZFN	25V 0.1U
C115	ECUV1E223KBN	25V 0.022U

Ref. No.	Part No.	Values & Remarks
C120	ECUV1H332KBN	50V 3300P
C121	ECUV1H221KBN	50V 220P
C204	RCE1AKA470IG	10V 47U
C205	ECUVNE104ZFN	25V 0.1U
C301, 302	ECUVNE104ZFN	25V 0.1U
C303	ECUV1E103KBN	25V 0.01U
C404	ECUVNC105ZFN	16V 1U
C405	ECUVNE104KBN	25V 0.1U
C501, 502	ECUV1H150KCN	50V 15P
C503	ECUV1H561KBN	50V 560P
C504	ECUV1C473KBN	16V 0.047U
C505	ECUV1E223KBN	25V 0.022U
C506	ECUVNC474KBN	16V 0.47U
C507	ECEA0GKA221	4V 220U
C508, 509	ECUVNE104ZFN	25V 0.1U
C511	ECUVNC474KBN	16V 0.47U
C512	ECUV1E103KBN	25V 0.01U
C513	RCST1AY475RE	10V 4.7U
C517	ECUVNE104ZFN	25V 0.1U
C518	ECUV1E103KBN	25V 0.01U
C525	ECUVNE104ZFN	25V 0.1U
C526	RCST0JY475LE	6.3V 4.7U
C527	ECUVNE104ZFN	25V 0.1U
C600	ECUVNE104ZFN	25V 0.1U
C601, 602	ECUV1H102KBN	50V 1000P
C603, 604	ECUV1H272KBN	50V 2700P
C605, 606	ECEA1CKA100I	16V 10U
C607, 608	ECUV1H681KBN	50V 680P
C609	ECUVNE104ZFN	25V 0.1U
C610	RCE1AKA470IG	10V 47U
C703, 704	ECUV1E123KBN	25V 0.012U
C705, 706	ECUV1H152KBN	50V 1500P
C709, 710	ECEA0GPK221I	4V 220U
C711, 712	ECEA1CPK100I	16V 10U
C713	RCE1AKA470IG	10V 47U
C717	ECUVNE104ZFN	25V 0.1U

Printed in Japan
H960511200 MK/HH